

2026 PRODUCT CATALOG

PASSENGER AND LIGHT TRUCK TIRES
(NORTH AMERICA)



A BRIEF RIDE THROUGH HISTORY

After a decade of promising growth, Armstrong purchased a small tire manufacturing plant in New Haven, Connecticut.

1912 ←

A tire dealer in New Jersey by the name of George F. Armstrong entered the tube and pneumatic tire industry in a tiny loft.

→ 1922

1961 ←

Armstrong became the fifth-largest tire maker in the world and ranked amongst the Fortune 500 companies.

Armstrong introduced the first bias-belted fiberglass tire, one of many inventions.

→ 1965

1970 ←

The Armstrong Rubber Company moved into its \$7 million headquarters designed by renowned architect Michael Brauer in New Haven, Connecticut.

Armstrong achieved a record sales volume worth \$1 billion.

→ 1986

1988 ←

Armstrong was acquired by Pirelli S.p.A, becoming Pirelli Armstrong tire Corporation.

Pirelli phased out the Armstrong brand in the latter half of the 1990s.

→ 1990

2012 ←

ZAFCO acquires the Armstrong brand from Pirelli with the goal of rebuilding it from the ground up.

Newly reengineered, the Armstrong brand returned to the tire industry, continuing the Armstrong legacy of making premium products by quality-minded people.

→ 2015

ABOUT US

Over the past 10 years, we've been steadily working to bring back one of the most reliable and trusted American tire brands — and modernizing it into a premium ZAFCO product offering.

Armstrong Tires is now part of the ZAFCO family of brands, and our dedication to quality, value, and safety turned out to be a perfect fit for the continuation of the Armstrong legacy.

Every Armstrong tire is backed by the uncompromising integrity and service that have been ZAFCO's signature for 30 years.

We're proud of the legacy that we've built over the last quarter century, and we look forward to growing the Armstrong brand with the help of key partners in the tire industry.



WHY ARMSTRONG?

VALUE-DRIVEN PRICING PROGRAM

Our unique pricing program was designed with our dealers in mind and is positioned to increase your profit margins so you can easily grow your business and stay competitive in today's modern tire industry.



RECOGNIZABLE NAME WITH A RICH LEGACY

The Armstrong name was once a household name listed as a Fortune 500 company and the 5th largest tire manufacturer in the world. We aim to restore Armstrong's legacy and solidify its place in the tire industry.

DOMESTIC DISTRIBUTION PROGRAM

Our tires are manufactured in our state-of-the-art factory just outside Bangkok, Thailand and are distributed from our warehouses throughout the United States to ensure speedy supply and readily available inventory.



A STELLAR SUITE OF SELL-OUT SUPPORT

Armstrong dealers receive sell-out support including training resources, marketing programs, and access to our Dealer Portal so you have all the sales tools you need at your fingertips.

A WARRANTY DESIGNED FOR SELLING

Armstrong's built-to-last warranty includes a two-year road hazard coverage, roadside assistance, mileage warranty up to 85,000 miles, and a 30-day money-back guarantee.



THE BUILT TO LAST WARRANTY

TUFF 360

It's easy to talk about quality when delivering on quality is easy. But what does quality look like when things don't go as planned?

What we're offering is peace of mind – on both sides of the sales counter. Our industry-leading warranty includes 100% replacement for road hazards within the first two years, plus reimbursement for flat tire repair along with roadside assistance. We also cover mileage claims for up to 85,000 miles along with a 30-day money back guarantee, no questions asked.



6 YEAR LIMITED
WARRANTY



MILEAGE WARRANTY,
UPTO 85K MILES



ROAD - HAZARD
COVERAGE



30-DAY MONEY BACK

For warranty coverage details, please visit armstrongtire.com/TUFF360



An aerial photograph of a two-lane asphalt road that curves through a hilly landscape. The road is flanked by sandy, light-brown soil and dense green vegetation. The perspective is from directly above, showing the road's path and the surrounding terrain.

**ARMSTRONG
ALL-SEASON TIRES**

BLU-TRAC PC3



BLU-TRAC PC3 is the 3rd generation PCR pattern with a symmetrical tread design and uniform tread blocks that ensures even load distribution and consistent road contact, promoting uniform tread wear and extending the tire's lifespan. Its optimized tread footprint provides a stable and smooth contact patch, reducing road noise and offering a comfortable, quiet ride, ideal for daily commuting.



6 YEAR LIMITED WARRANTY




85K MILEAGE WARRANTY



ROAD HAZARD COVERAGE




30-DAY MONEY BACK



SYMMETRICAL TREAD DESIGN.

Features uniform tread block structure promotes even load distribution and consistent road contact, leading to uniform tread wear and maximizing the tire's potential lifespan.




OPTIMIZED TREAD FOOTPRINT.

Contributes to a stable and smooth contact patch. This engineering choice results in reduced road noise and an overall comfortable, quiet ride, ideal for daily commuting.



MULTIPLE CIRCUMFERENTIAL GROOVES AND WIDE SHOULDER CHANNELS.

Are strategically placed to channel water efficiently out of the tread contact area. This design ensures reliable traction in both dry and moderate wet conditions, significantly enhancing hydroplaning resistance.



UNIQUE SIPE DESIGN.

Optimized to enhance riding comfort while simultaneously minimizing noise.

BLU-TRAC PC3 / UTQG 600 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
18	60	235/60R18	107V XL	2149	50	7.0	9.4	29.1	10
17	60	225/60R17	99V	1709	44	6.5	9.0	27.6	10
	65	215/65R17	103V XL	1929	50	6.5	8.7	28.0	10
		215/65R17	99V	1709	44	6.5	8.7	28.0	10
	50	195/50R16	88V XL	1235	50	6.0	7.9	23.7	10
16	60	205/60R16	92V	1389	44	6.0	8.2	25.7	10
		205/60R16	96V XL	1565	50	6.0	8.2	25.7	10
		215/60R16	95V	1521	44	6.5	8.7	26.1	10
		215/60R16	99V XL	1709	50	6.5	8.7	26.1	10
	65	225/60R16	102W XL	1874	50	6.5	9.0	26.6	10
		215/65R16	102V XL	1874	50	6.5	8.7	27.0	10
		215/65R16	98H	1653	44	6.5	8.7	27.0	10
		175/55R15	77T	908	44	5.5	7.2	22.6	10
15	55	185/55R15	82V	1047	44	6.0	7.6	23.0	10
		185/55R15	86V XL	1168	50	6.0	7.6	23.0	10
		185/60R15	84H	1102	44	5.5	7.4	23.7	10
	60	185/60R15	88H XL	1235	50	5.5	7.4	23.7	10
		195/60R15	88H	1235	44	6.0	7.9	24.2	10
		195/60R15	88V	1235	44	6.0	7.9	24.2	10
		205/60R15	91V	1356	44	6.0	8.2	24.7	10
		175/65R15	84H	1102	44	5.0	7.0	24.0	10
	65	185/65R15	88H	1235	44	5.5	7.4	24.4	10
		195/65R15	91H	1356	44	6.0	7.9	25.0	10
		195/65R15	91V	1356	44	6.0	7.9	25.0	10
		195/65R15	95H XL	1521	50	6.0	7.9	25.0	10
		205/65R15	94V	1477	44	6.0	8.2	25.5	10
		205/65R15	99H XL	1709	50	6.0	8.2	25.5	10
		205/70R15	100H XL	1764	50	6.0	8.2	26.3	10
	70	205/70R15	96H	1565	44	6.0	8.2	26.3	10
		215/70R15	98H	1653	44	6.5	8.7	26.9	10
14	75	235/75R15	109T XL	2271	50	6.5	9.3	28.9	10
	65	175/65R14	82H	1047	44	5.0	7.0	23.0	10
		185/65R14	86H	1168	44	5.5	7.4	23.5	10
	70	185/70R14	88H	1235	44	5.5	7.4	24.3	10
		195/70R14	91H	1356	44	6.0	7.9	24.8	10
		195/70R14	95H XL	1521	50	6.0	7.9	24.8	10

BLU-TRAC PC2



BLU-TRAC PC2 is the 2nd generation PCR pattern featuring an optimized tread design with wide lateral shoulder grooves integrated into the inner blocks, enhancing resistance to hydroplaning and providing superior wet handling, braking, and cornering stability. The design includes a wide straight four-channel grooves, with optimal widths and arrangements that ensure exceptional performance in wet driving conditions. Additionally, the enhanced multi-pitch sequencing utilizes carefully crafted block sizes to minimize road noise.



6 YEAR LIMITED WARRANTY



85K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



OPTIMIZED TREAD DESIGN WITH WIDE LATERAL SHOULDER GROOVES.

Integrated into the inner blocks, providing resistance to hydroplaning for superior wet handling, braking, and improved cornering stability.



WIDE STRAIGHT FOUR-CHANNEL GROOVE.

The optimal width and arrangement of the four-channel grooves guarantee outstanding performance in wet driving conditions.



MULTIPLE CIRCUMFERENTIAL GROOVES AND WIDE SHOULDER CHANNELS.

Are strategically placed to channel water efficiently out of the tread contact area. This design ensures reliable traction in both dry and moderate wet conditions, significantly enhancing hydroplaning resistance.



UNIQUE SIPE DESIGN.

Optimized to enhance riding comfort while simultaneously minimizing noise.

BLU-TRAC PC2 / UTQG 600, 700 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
16	60	205/60R16	96V XL	1565	50	6.0	8.2	25.7	9
		215/60R16	99V XL	1709	50	6.5	8.7	26.1	9
		225/60R16	102V XL	1874	50	6.5	9.0	26.6	9
15	60	185/60R15	88H XL	1235	50	5.5	7.4	23.7	9
		185/65R15	88H	1235	44	5.5	7.4	24.4	9
	65	195/65R15	91H	1356	44	6.0	7.9	25.0	9
		205/65R15	94V	1477	44	6.0	8.2	25.5	9
14	65	165/65R14	79H	963	44	5.0	6.7	22.4	9
	70	165/70R14	81H	1019	44	5.0	6.7	23.1	9
13	65	165/65R13	77T	908	44	5.0	6.7	21.4	9
	70	165/70R13	79T	963	44	5.0	6.7	22.1	9
		175/70R13	82T	1047	44	5.0	7.0	22.7	9
12	70	155/70R12	73T	805	44	4.5	6.2	20.6	9
		165/70R12	77T	908	44	5.0	6.7	21.1	9

UPCOMING SIZES			
RIM DIAMETER	SERIES	SIZE	LI/SS
16	60	235/60R16	100V
	65	205/65R16	95V
		235/65R16	103H
15	60	175/60R15	81H
14	60	185/60R14	82H
	70	175/70R14	88TXL

BLU-TRAC PC2 WLW

CLASSIC CARS



BLU-TRAC PC2 is the 1st pattern for classic car applications. An optimized tread layout combines wide shoulder grooves and straight circumferential channels to help evacuate water and support confident wet-road handling, steady braking feel, and stable cornering. A tuned multi-pitch block sequence helps reduce pattern noise for a smoother, quieter cruising experience. Completing the design is a crisp, concentric white-line sidewall that is ideal for vintage restorations, classic luxury sedans, and modern retro-mod builds.



6 YEAR LIMITED
WARRANTY




35K MILEAGE
WARRANTY



ROAD HAZARD
COVERAGE



30-DAY MONEY
BACK




OPTIMIZED TREAD DESIGN WITH WIDE LATERAL SHOULDER GROOVES.

Integrated into the inner blocks, providing resistance to hydroplaning for superior wet handling, braking, and improved cornering stability.



WIDE STRAIGHT THREE-CHANNEL GROOVES.

The optimal widths and arrangement of the three-channel grooves guarantee outstanding performance in wet driving conditions.



ENHANCED MULTI-PITCH SEQUENCING.

Carefully crafted block sizes minimize road noise.



WHITE-LINED SIDEWALL.

Creates the ultimate stylistic bridge between vintage elegance and modern performance. Its defining feature is the crisp, concentric white stripe integrated into the sidewall.

BLU-TRAC PC2 WLW / UTQG 400 A A / M+S									
RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
15	Classic	155R15*	82H	1047	44	4.5	6.1	24.6	9
		165R15*	86V	1168	44	4.5	6.6	25.2	9

* Available in WLW sidewall style

BLU-TRAC PC



This next-generation of passenger tire is designed to deliver a smoother ride with reduced road noise and more even tread wear, while also providing enhanced traction and braking ability in both wet and dry conditions.



6 YEAR LIMITED WARRANTY



85K MILEAGE WARRANTY



ROAD HAZARD REPAIRS



30-DAY MONEY BACK




A SYMMETRIC TREAD DESIGN.

Symmetric tread design leads to smoother rolling on the road and even tread wear throughout the tire's lifespan.



A SET OF DYNAMIC INNER RIBS.

A three-across set of inner ribs reduces road noise and improves ride comfort.



A SELF-LOCKING SIPE SYSTEM.

A self-locking sipe system ensures exceptional water evacuation to enhance road traction and braking.



LATERAL CHAMFERED EDGES.

Chamfered edges of the lateral grooves reduce rolling resistance and increase tread rigidity.

BLU-TRAC PC / UTQG 700 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
17	60	225/60R17	99H	1709	44	7.0	9.1	27.7	10
		225/60R17	99V	1709	44	7.0	9.1	27.7	10
	65	215/65R17	99V	1709	44	7.0	9.0	28.1	10
16	55	185/55R16	87H XL	1201	50	6.0	7.5	24.0	10
		205/55R16	91H	1356	44	6.5	8.2	24.9	9
		205/55R16	94V XL	1477	50	6.5	8.2	24.9	9
		195/60R16	89V	1279	44	6.0	7.8	25.2	9
		205/60R16	92V	1389	44	6.0	8.0	25.6	9
		215/60R16	99V XL	1709	50	6.0	8.4	26.1	10
	60	225/60R16	102V XL	1874	50	6.5	8.9	26.5	10
		235/60R16	100V	1764	44	7.0	9.3	27.0	10
		205/65R16	95V	1521	44	6.0	8.2	26.4	11
	65	215/65R16	102H XL	1874	50	6.5	8.7	26.9	10
15	50	165/50R15	76T XL	882	50	5.0	6.5	21.5	10
	60	175/60R15	81H	1019	44	5.5	7.1	23.2	10
		185/60R15	88H XL	1235	50	5.5	7.3	23.6	10
		175/65R15	84H	1102	44	5.5	7.0	23.9	10
	65	185/65R15	88H	1235	44	5.5	7.4	24.5	9
		195/65R15	95H XL	1521	50	6.0	7.9	25.0	9
		195/65R15	91V	1356	44	6.0	7.9	25.0	9
		205/65R15	99H XL	1709	50	6.0	8.2	25.4	10
	70	215/70R15	98H	1653	44	6.5	8.8	26.8	10
	75	235/75R15	109T XL	2271	50	6.5	9.3	28.7	10
14	55	165/55R14	72T	783	44	5.0	6.6	21.1	9
	60	165/60R14	75H	853	44	5.0	6.7	21.8	10
		185/60R14	82H	1047	44	5.5	7.4	22.6	9
		155/65R14	75T	853	44	5.0	6.5	21.9	9
	65	165/65R14	79T	963	44	5.0	6.8	22.4	9
		175/65R14	82H	1047	44	5.0	7.3	23.0	10
		165/70R14	81T	1019	44	5.0	6.7	23.6	9
	70	175/70R14	88T XL	1235	50	5.0	6.9	23.6	9
		185/70R14	88H	1235	44	5.5	7.6	24.2	9
		195/70R14	95H XL	1521	50	5.5	7.8	24.8	9
13	65	155/65R13	73T	805	44	5.0	6.5	20.8	9
		165/65R13	77T	908	44	5.0	6.8	21.3	10
		145/70R13	71T	761	44	4.5	6.0	20.9	10
	70	155/70R13	75T	853	44	4.5	6.2	21.4	9
		165/70R13	79T	963	44	5.0	6.7	21.9	9
		175/70R13	82T	1047	44	5.0	6.9	22.5	9
	80	155/80R13	79T	963	44	5.0	6.3	22.6	9

BLU-TRAC HP3



BLU-TRAC HP3 is the 3rd generation high-performance tire featuring an optimized asymmetric tread design with distinct inner and outer shoulder blocks for improved wet-road traction and handling stability. The solid outer blocks enhance cornering grip on dry surfaces, while the inner blocks aid in water evacuation. Additionally, the high-density siping includes zig-zag and straight-line patterns that create multiple biting edges for superior braking performance in both dry and wet conditions.



6 YEAR LIMITED WARRANTY



45K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



OPTIMIZED ASYMMETRIC TREAD DESIGN.

Features distinct inner and outer shoulder blocks designed to balance wet-road traction and handling stability. The solid outer blocks enhance cornering grip on dry pavement, while the inner blocks help in water evacuation.



HIGH-DENSITY SIPING.

Incorporates a high volume of zig-zag and straight-line sipes across the inner ribs. This design is engineered to create numerous biting edges, providing superior dry and wet braking performance.



CIRCUMFERENTIAL GROOVES.

Utilizes four prominent, deep, and continuous longitudinal channels crucial for rapid and efficient hydroplaning resistance by quickly evacuating large volumes of water away from the tire's contact patch.



THREE MAIN SOLID RIBS WITH GROOVE-BOTTOM PATTERNS.

Feature a connected configuration that contributes to a stable, quiet ride, improved steering response, and consistent road contact—essential for high-speed performance.

BLU-TRAC HP3 / UTQG 340 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	35	245/35R20	95Y XL	1521	50	8.5	9.8	26.8	10
		255/35R20	97Y XL	1609	50	9.0	10.2	27.0	10
		275/35R20	102Y XL	1874	50	9.5	10.9	27.6	10
	40	245/40R20	99Y XL	1709	50	8.5	9.8	27.7	10
		255/40R20	101Y XL	1819	50	9.0	10.2	28.0	10
19	40	245/40R19	98Y XL	1653	50	8.5	9.8	26.7	10
		255/40R19	100Y XL	1764	50	9.0	10.2	27.0	10
		275/40R19	105Y XL	2039	50	9.5	10.9	27.7	10
	45	225/45R19	96Y XL	1565	50	7.5	8.9	27.0	10
		235/45R19	99Y XL	1709	50	8.0	9.3	27.4	10
		245/45R19	102Y XL	1874	50	8.0	9.6	27.7	10
		215/35R18	84W XL	1102	50	7.5	8.6	23.9	10
18	35	265/35R18	97Y XL	1609	50	9.5	10.7	25.3	10
		225/40R18	92Y XL	1389	50	8.0	9.1	25.1	10
	40	235/40R18	95Y XL	1521	50	8.5	9.5	25.4	10
		245/40R18	97Y XL	1609	50	8.5	9.8	25.7	10
		275/40R18	103Y XL	1929	50	9.5	10.9	26.7	10
	45	215/45R18	93Y XL	1433	50	7.0	8.4	25.6	10
		225/45R18	95Y XL	1521	50	7.5	8.9	25.9	10
		235/45R18	98Y XL	1653	50	8.0	9.3	26.3	10
		245/45R18	100Y XL	1764	50	8.0	9.6	26.7	10
		225/50R18	95W	1521	44	7.0	9.2	26.9	10
	50	225/50R18	99W XL	1709	50	7.0	9.2	26.9	10
		235/50R18	97V	1609	44	7.5	9.6	27.3	10
		235/50R18	101Y XL	1819	50	7.5	9.6	27.3	10
		245/50R18	100Y	1764	44	7.5	10.0	27.7	10
		245/50R18	104W XL	1984	50	7.5	10.0	27.7	10
	40	205/40R17	84W XL	1102	50	7.5	8.3	23.5	10
		245/40R17	95Y XL	1521	50	8.5	9.8	24.7	10
		205/45R17	88W XL	1235	50	7.0	8.1	24.3	10
		215/45R17	91Y XL	1356	50	7.0	8.4	24.6	10
	45	225/45R17	91Y	1356	44	7.5	8.9	25.0	10
		225/45R17	94Y XL	1477	50	7.5	8.9	25.0	10
		235/45R17	97Y XL	1609	50	8.0	9.3	25.4	10
		245/45R17	99Y XL	1709	50	8.0	9.6	25.7	10
		205/50R17	93W XL	1433	50	6.5	8.4	25.1	10
17	50	215/50R17	95W XL	1521	50	7.0	8.9	25.5	10
		225/50R17	98Y XL	1653	50	7.0	9.2	25.9	10
		245/50R17	99W	1709	44	7.5	10.0	26.7	10
		205/55R17	95W XL	1521	50	6.5	8.4	25.9	10
		215/55R17	94V	1477	44	7.0	8.9	26.3	10
	55	215/55R17	98W XL	1653	50	7.0	8.9	26.3	10
		225/55R17	101Y XL	1819	50	7.0	9.2	26.8	10
		205/55R17	95W XL	1521	50	6.5	8.4	25.9	10
		215/55R17	94V	1477	44	7.0	8.9	26.3	10
		225/55R17	101Y XL	1819	50	7.0	9.2	26.8	10

BLU-TRAC HP3 / UTQG 340 A A / M+S									
RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
16	50	205/50R16	87W	1201	44	6.5	8.4	24.1	10
		205/50R16	91W XL	1356	50	6.5	8.4	24.1	10
	55	205/55R16	91V	1356	44	6.5	8.4	24.9	10
		205/55R16	94V XL	1477	50	6.5	8.4	24.9	10
		205/55R16	94W XL	1477	50	6.5	8.4	24.9	10
		215/55R16	97W XL	1609	50	7.0	8.9	25.3	10
		225/55R16	99Y XL	1709	50	7.0	9.2	25.7	10
15	50	205/50R15	86V	1168	44	6.5	8.4	23.1	10
		205/50R15	89W XL	1279	50	6.5	8.4	23.1	10
	55	205/55R15	88V	1235	44	6.5	8.4	23.9	10
		205/55R15	92V XL	1389	50	6.5	8.4	23.9	10

NEW

BLU-TRAC HP2 / ULTRA HIGH PERFORMANCE / SUMMER

BLU-TRAC HP2



BLU-TRAC HP2 is the 2nd generation high-performance tire engineered for balanced performance and a quiet ride in various conditions. Its unique asymmetrical tread design works in tandem with variable-width grooves to enhance stability, providing excellent water evacuation for wet roads and superior steering grip for dry cornering. This design, along with enhanced multi-pitch sequencing, is carefully crafted to minimize road noise.



6 YEAR LIMITED WARRANTY




45K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK




UNIQUE ASYMMETRICAL TREAD DESIGN.

Designed for both wet and dry conditions, the inner tread improves water evacuation and reduces noise, while the outer tread enhances steering grip for dry cornering and helps minimize noise.




VARIABLE GROOVE WIDTH.

For improved stability and balanced dry/wet performance.



ENHANCED MULTI-PITCH SEQUENCING.

Carefully crafted block sizes minimize road noise.



ADVANCED COMPOUND.

Guarantees optimal engagement between the tire and the road surface, leading to enhanced acceleration and shorter braking distances in various temperatures and road conditions.

BLU-TRAC HP2 / UTQG 340 A A									
RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
18	45	235/45R18	98W XL	1653	50	8.0	9.3	26.3	9
17	50	215/50R17	95V XL	1521	50	7.0	8.9	25.5	9
16	55	185/55R16	83V	1074	44	6.0	7.6	24.0	9
		195/55R16	91V XL	1356	50	6.0	7.9	24.4	9
		205/55R16	94V XL	1477	50	6.5	8.4	24.9	9
		215/55R16	97W XL	1609	50	7.0	8.9	25.3	9
		225/55R16	95W	1521	44	7.0	9.2	25.8	9

UPCOMING SIZES			
RIM DIAMETER	SERIES	SIZE	LI/SS
19	35	225/35R19	88W XL
		235/35R19	91W XL
	40	235/40R19	96Y XL
18	35	255/35R18	94W XL
	45	245/45R18	100Y XL
		255/45R18	103W XL
		225/60R18	100H
	60	225/60R18	100H
17	45	225/45R17	94W XL
	50	225/50R17	98W XL
	55	215/55R17	98W XL
		225/55R17	101W XL
		235/55R17	103W XL
16	50	225/50R16	92W
15	50	195/50R15	86V XL
	55	195/55R15	85V

BLU-TRAC HP



This ultra-high-performance tire features circumferential and sub-straight grooves that deliver enhanced water evacuation, handling, and stability. Its sipe design provides increased grip, safety, and comfort, while a silent groove wall reduces outside noise.



6 YEAR LIMITED WARRANTY



45K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



FOUR WIDE CIRCUMFERENTIAL GROOVES.

These four grooves, which span the circumference of the tire, work in conjunction with the lateral grooves to evacuate water rapidly, leading to improved handling and traction.



A VARIETY OF SIPE DESIGNS.

A variety of sipes distributed on the inner ribs create extra gripping surfaces for enhanced safety and ride comfort.



SUB-STRAIGHT GROOVES.

Sub-straight grooves in the outer shoulders improve cornering precision and stability.



AN INNOVATIVE SILENT GROOVE WALL.

The silent groove wall reduces external noise by disrupting the airflow through vertical serrations.

BLU-TRAC HP / UTQG 340 A A / M+S										
RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH	
				LBS	PSI	INCHES	INCHES	INCHES	32NDS	
21	35	275/35R21	103Y XL	1929	50	9.5	10.7	29.0	8	
20	30	225/30R20*	85Y XL	1135	50	8.0	8.7	25.0	9	
		245/30R20*	90Y XL	1323	50	8.5	9.2	26.1	9	
		255/30R20*	92Y XL	1389	50	9.0	10.0	26.1	9	
		275/30R20*	97Y XL	1609	50	9.5	10.6	26.7	9	
		285/30R20*	99Y XL	1709	50	10.0	11.1	26.8	9	
		225/35R20	90Y XL	1323	50	8.0	8.9	26.5	10	
	35	235/35R20*	92Y XL	1389	50	8.5	9.4	26.6	9	
		245/35R20	95Y XL	1521	50	8.5	9.2	27.0	9	
		255/35R20	97Y XL	1609	50	8.5	10.2	27.4	8	
		275/35R20	102Y XL	1874	50	9.5	10.8	28.0	8	
		235/40R20*	96Y XL	1565	50	8.5	9.3	27.6	9	
		245/40R20	99Y XL	1709	50	8.5	9.6	27.9	8	
	40	255/40R20*	101Y XL	1819	50	9.0	10.0	28.3	9	
		265/30R19*	93Y XL	1433	50	9.5	10.4	25.4	9	
	19	30	285/30R19*	98Y XL	1653	50	10.0	11.1	26.0	9
			215/35R19*	85Y XL	1135	50	7.5	8.3	25.2	9
35		225/35R19	88W XL	1235	50	8.0	8.8	25.3	10	
		235/35R19	91W XL	1356	50	8.0	8.9	25.6	10	
		245/35R19	93W XL	1433	50	8.0	9.2	25.9	10	
		255/35R19	96W XL	1565	50	9.0	10.1	26.0	9	
		265/35R19	98Y XL	1653	50	9.0	10.3	26.4	9	
		275/35R19	100Y XL	1764	50	9.5	10.6	26.9	8	
40		225/40R19	93Y XL	1433	50	8.0	8.7	26.4	9	
		235/40R19	96Y XL	1565	50	8.0	9.2	26.4	9	
		245/40R19	98Y XL	1653	50	8.0	9.2	27.1	9	
		255/40R19	100Y XL	1764	50	9.0	10.1	27.2	10	
		275/40R19	105Y XL	2039	50	9.5	10.6	27.9	8	
		235/45R19	99Y XL	1709	50	8.0	9.2	27.4	9	
45		245/45R19	102Y XL	1874	50	8.0	9.4	27.9	10	
		255/45R19*	104Y XL	1984	50	8.5	9.9	28.2	9	
	35	225/35R18*	87Y XL	1201	50	8.0	8.7	24.3	9	
245/35R18*		92Y XL	1389	50	8.5	9.5	24.8	9		
255/35R18		94W XL	1477	50	8.5	9.7	24.9	10		
265/35R18		97Y XL	1609	50	10.0	10.5	25.1	6		
275/35R18		99Y XL	1709	50	10.0	10.8	25.3	7		
205/40R18		86Y XL	1168	50	7.5	8.4	24.6	10		
18	40	215/40R18*	89Y XL	1279	50	7.5	8.4	25.0	9	
		225/40R18	92Y XL	1389	50	8.0	9.0	25.2	9	
		235/40R18	95W XL	1521	50	8.5	9.5	25.4	10	
	40	245/40R18	97W XL	1609	50	8.0	9.3	25.8	9	
		255/40R18	99Y XL	1709	50	8.5	10.0	26.2	9	
		275/40R18	103Y XL	1929	50	9.5	10.7	26.7	9	

* Newly added sizes

BLU-TRAC HP / UTQG 340 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
18	45	215/45R18	93Y XL	1433	50	7.0	8.1	25.9	10
		225/45R18	95W XL	1521	50	7.5	8.8	26.1	10
		235/45R18	98W XL	1653	50	8.0	9.3	26.3	9
		245/45R18	100W XL	1764	50	8.0	9.4	26.7	9
		255/45R18	103W XL	1929	50	8.5	10.0	27.0	10
	50	215/50R18*	96W XL	1565	50	7.0	8.7	26.7	9
		225/50R18	99W XL	1709	50	7.0	8.9	27.0	9
		235/50R18	101W XL	1819	50	7.5	9.6	27.3	10
		245/50R18	104W XL	1984	50	7.0	9.8	27.8	10
	60	225/60R18	100H	1764	44	7.0	9.2	28.6	10
17	35	225/35R17*	86Y XL	1168	50	8.0	8.9	23.3	9
	40	195/40R17*	81V XL	1019	50	7.0	7.7	23.3	9
		205/40R17	84Y XL	1102	50	7.5	8.1	23.6	9
		215/40R17	87W XL	1201	50	7.5	8.6	23.9	10
		245/40R17	95W XL	1521	50	8.5	9.7	24.7	10
		255/40R17*	98W XL	1653	50	9.0	10.0	25.1	9
	45	205/45R17	88W XL	1235	50	7.0	8.1	24.3	10
		215/45R17	91W XL	1356	50	7.0	8.3	24.7	9
		225/45R17	94Y XL	1477	50	7.5	8.7	25.0	9
		235/45R17	97W XL	1609	50	7.0	8.7	25.4	9
		245/45R17	99W XL	1709	50	8.0	9.6	25.7	9
	50	205/50R17	93W XL	1433	50	7.0	8.4	25.3	9
		215/50R17	95W XL	1521	50	7.0	8.6	25.6	10
		225/50R17	98W XL	1653	50	7.0	8.9	26.0	10
		235/50R17	100Y XL	1764	50	7.5	9.5	26.3	9
		245/50R17	99W	1709	44	7.5	9.8	26.7	10
	55	205/55R17	95W XL	1521	50	6.5	8.2	26.1	9
		215/55R17	98W XL	1653	50	7.0	8.9	26.4	9
		225/55R17	101W XL	1819	50	7.0	9.0	26.9	10
		235/55R17	103W XL	1929	50	7.5	9.7	27.1	10
	60	215/60R17	96H	1565	44	6.5	8.7	27.1	10
16	45	195/45R16	84V XL	1102	50	6.5	7.6	22.9	10
		205/45R16	87W XL	1201	50	7.0	8.1	23.2	10
		215/45R16*	90W XL	1323	50	7.0	8.3	23.7	9
	50	195/50R16	88V XL	1235	50	6.0	7.8	23.7	10
		205/50R16	87Y	1202	44	6.5	8.2	24.1	10
		225/50R16	92W	1389	44	7.0	9.2	24.8	10
		195/55R16	91V XL	1356	50	6.0	8.0	24.4	10
	55	205/55R16	94W XL	1477	50	6.5	8.4	24.8	9
		215/55R16	97W XL	1609	50	7.0	8.9	25.2	9
		225/55R16	99W XL	1709	50	7.0	9.0	25.6	9
15	50	195/50R15	86V XL	1168	50	6.0	7.8	22.7	10
	55	185/55R15	82V	1047	44	6.0	7.6	23.0	10
		195/55R15	85V	1135	44	6.0	7.9	23.4	10
14	55	185/55R14	80H	992	44	6.0	7.6	22.0	10

* Newly added sizes

TRU-TRAC SU3



TRU-TRAC SU3 is the 3rd generation SUV tire featuring an optimized asymmetric tread design with distinct inner and outer shoulder blocks for improved wet-road traction and handling stability. The solid outer blocks enhance cornering grip on dry surfaces, while the inner blocks aid in water evacuation. Additionally, the high-density siping includes zig-zag and straight-line patterns that create multiple biting edges for superior braking performance in both dry and wet conditions.



6 YEAR LIMITED WARRANTY



65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



OPTIMIZED ASYMMETRIC TREAD DESIGN.

Features distinct inner and outer shoulder blocks designed to balance wet-road traction and handling stability. The solid outer blocks enhance cornering grip on dry pavement, while the inner blocks help in water evacuation.



HIGH-DENSITY SIPING.

Incorporates a high volume of zig-zag and straight-line sipes across the inner ribs. This design is engineered to create numerous biting edges, providing superior dry and wet braking performance.



CIRCUMFERENTIAL GROOVES.

Utilizes four prominent, deep, and continuous longitudinal channels crucial for rapid and efficient hydroplaning resistance by quickly evacuating large volumes of water away from the tire's contact patch.



THREE MAIN SOLID RIBS WITH GROOVE-BOTTOM PATTERNS.

Feature a connected configuration that contributes to a stable, quiet ride, improved steering response, and consistent road contact—essential for high-speed performance.

TRU-TRAC SU3 / UTQG 500 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
24	35	295/35R24	110W XL	2337	50	10.5	11.9	32.1	10
		305/35R24	112W XL	2469	50	11.0	12.3	32.4	10
22	35	265/35R22	102Y XL	1875	50	9.5	10.7	29.3	10
	40	305/40R22	114W XL	2601	50	11.0	12.3	31.6	10
	45	275/45R22	112W XL	2469	50	9.0	10.7	31.8	10
		285/45R22	114Y XL	2601	50	9.5	11.2	32.1	10
		305/45R22	118W XL	2910	50	10.0	11.9	32.8	10
	50	275/50R22	111V	2405	44	8.5	11.2	32.9	10
	40	275/40R20	106Y XL	2094	50	9.5	10.9	28.7	10
20	45	245/45R20	103Y XL	1929	50	8.0	9.6	28.7	10
		255/45R20	105Y XL	2039	50	8.5	10.0	29.1	10
		245/50R20	102V	1874	44	7.5	10.0	29.7	10
	50	245/50R20	105V XL	2039	50	7.5	10.0	29.7	10
		265/50R20	111W XL	2403	50	8.5	10.9	30.5	10
		235/55R20	102V	1875	44	7.5	9.6	30.2	10
	55	235/55R20	105W XL	2039	50	7.5	9.6	30.2	10
		275/55R20	117V XL	2833	50	8.5	11.2	31.9	10
	60	275/60R20	115H	2679	44	8.0	11.0	33.0	10
	50	255/50R19	107Y XL	2149	50	8.0	10.4	29.1	10
19	55	235/55R19	105W XL	2039	50	7.5	9.6	29.2	10
	60	255/60R19	113V XL	2535	50	7.5	10.2	31.1	10
18	55	235/55R18	104V XL	1984	50	7.5	9.6	28.1	10
		255/55R18	109Y XL	2270	50	8.0	10.4	29.0	10
	60	235/60R18	107W XL	2149	50	7.0	9.4	29.1	11
		245/60R18	105V	2039	44	7.0	9.8	29.6	10
	65	235/65R18	106W	2094	44	7.0	9.4	30.0	10
	65	235/65R17	108V XL	2205	50	7.0	9.4	29.1	10

TRU-TRAC SU2



TRU-TRAC SU2 is the 2nd generation SUV tire engineered for superior handling and stability, particularly for SUVs. The inner part uses open channels for water drainage to deliver outstanding grip and cornering traction, while the outer tread has wide shoulders and advanced sipes to withstand heavy loads and improve steering performance. To ensure a quieter driving experience, the tire incorporates noise reduction lines within its grooves to diminish road noise.



6 YEAR LIMITED WARRANTY




65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



OPTIMIZED INNER TREAD DESIGN.

Delivers outstanding grip and stability and traction while cornering due to the presence of water-drainage open channels.




UNIQUE OUTER TREAD DESIGN.

With wide shoulder and advanced sipe design, withstands loads and provide enhanced contact pitch for better steering performance.



NOISE REDUCTION PATTERN.

Implemented within the grooves effectively diminishes tread pattern noise during contact with the road by expanding the groove surface area.



ADVANCED COMPOUND.

Guarantees optimal engagement between the tire and the road surface, leading to enhanced acceleration and shorter braking distances in various temperatures and road conditions.

TRU-TRAC SU2 / UTQG 600 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
19	55	225/55R19	99V	1709	44	7.0	9.2	28.8	10
18	50	235/50R18	101W XL	1819	50	7.5	9.6	27.3	10
	55	225/55R18	98V	1653	44	7.0	9.2	27.8	10
17	55	215/55R17	98W XL	1653	50	7.0	8.9	26.3	9
	60	215/60R17	96H	1565	44	6.5	8.7	27.2	9
		225/60R17	99V	1709	44	6.5	9.0	27.6	9

UPCOMING SIZES

RIM DIAMETER	SERIES	SIZE	LI/SS
22	40	265/40R22	106Y XL
		275/40R22	108Y XL
21	45	265/45R21	108W XL
		275/45R21	110Y XL
20	45	265/45R20	108Y XL
		275/45R20	110W XL
	50	255/50R20	109V XL
19	50	235/50R19	103W XL
18	55	215/55R18	99V XL
		235/55R18	104V XL
	60	245/60R18	105V
		265/60R18	114V XL
	65	235/65R18	106W
17	60	205/60R17	97W XL

TRU-TRAC SU



True to the Armstrong TRU-TRAC legacy, this SUV tire provides reduced rolling resistance and increased wet grip, plus a shoulder base that inhibits block wriggling and tire deformity. Stiff sidewalls absorb impact and improve ride comfort while a wide footprint enhances overall driving safety and stability.



6 YEAR LIMITED WARRANTY



65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



CROSS-LINKED SIPES.

Specially engineered cross-linked sipes on the inner ribs reduce rolling resistance and increase grip in wet conditions.



A WIDE FOOTPRINT.

A wide "footprint" - the portion of the tire's tread that makes contact with the road surface - provides overall driving safety and stability.



A UNIQUE SIDEWALL CONSTRUCTION.

A unique sidewall construction absorbs impact on uneven roads to enhance ride comfort.



A SHOULDER BOTTOM BASE.

A shoulder bottom base and blocks retain continuity by reducing block wriggling and tire deformation.

TRU-TRAC SU / UTQG 440 A A / M+S									
RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
24	35	295/35R24	110Y XL	2337	50	10.5	11.4	32.4	8
		305/35R24	112W XL	2469	50	10.5	12.0	32.5	10
22	30	235/30R22*	90W XL	1323	50	8.5	9.3	27.8	9
		245/30R22*	92W XL	1389	50	8.5	9.4	28.1	9
		295/30R22*	103Y XL	1929	50	10.5	11.5	29.3	8
	35	265/35R22	102Y XL	1874	50	9.5	10.2	29.4	9
		285/35R22*	106W XL	2094	50	10.0	11.1	30.2	9
		315/35R22	111Y XL	2403	50	11.0	12.2	30.9	8
	40	265/40R22	106Y XL	2094	50	9.5	10.5	30.6	9
		275/40R22	108Y XL	2205	50	9.5	10.7	30.9	9
		285/40R22	110Y XL	2337	50	10.0	11.1	31.0	9
		305/40R22	114W XL	2601	50	11.0	12.4	31.6	10
	45	275/45R22	112W XL	2469	50	9.5	10.6	31.8	9
		285/45R22	114Y XL	2600	50	10.0	11.1	32.2	9
		305/45R22*	118W XL	2910	50	10.0	11.8	33.0	9
	50	275/50R22	111V	2403	44	8.5	11.0	32.9	9
21	35	285/35R21*	105Y XL	2039	50	10.0	11.1	29.1	8
		295/35R21*	107Y XL	2149	50	10.5	11.5	29.4	8
		265/40R21	105Y XL	2039	50	9.5	10.5	29.6	9
	40	295/40R21	111Y XL	2403	50	10.5	11.7	30.5	9
		265/45R21	108W XL	2205	50	9.0	10.3	30.6	9
	45	275/45R21	110Y XL	2337	50	9.0	10.7	30.9	9
	50	275/50R21	113V XL	2535	50	8.5	11.0	32.1	9
20	35	315/35R20	110Y XL	2337	50	11.0	12.2	28.9	8
		265/40R20*	104Y XL	1984	50	9.5	10.4	28.5	9
		275/40R20	106Y XL	2094	50	9.5	10.8	28.9	9
	40	295/40R20*	110Y XL	2337	50	10.5	11.5	29.5	9
		245/45R20	103Y XL	1929	50	8.5	9.3	28.8	8
		255/45R20*	105Y XL	2039	50	8.5	9.8	29.1	9
	45	265/45R20	108Y XL	2205	50	9.0	10.4	29.6	9
		275/45R20	110W XL	2337	50	9.0	10.6	29.8	10
	50	245/50R20	102V	1874	44	7.5	9.8	29.9	10
		255/50R20	109V XL	2271	50	7.5	10.2	30.3	10
		265/50R20	111V XL	2403	50	8.5	10.8	30.5	10
		285/50R20	116V XL	2756	50	9.0	11.5	31.4	9
		235/55R20*	105W XL	2039	50	7.5	9.7	30.1	9
	55	255/55R20*	110Y XL	2337	50	8.0	10.4	31.3	9
		275/55R20	117V XL	2833	50	8.5	10.9	31.9	11
	60	275/60R20	115H	2679	44	8.0	10.9	33.0	10
19	45	225/45R19	96W XL	1565	50	8.0	9.1	26.7	9
	50	235/50R19*	103V XL	1929	50	7.5	9.5	28.3	10
		255/50R19	107W XL	2149	50	8.0	10.1	29.1	10

* Newly added sizes

TRU-TRAC SU / UTQG 440 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
19	55	225/55R19	99V	1709	44	8.0	9.5	28.8	10
		235/55R19	105V XL	2039	50	8.0	9.8	29.2	10
		245/55R19*	103Y	1929	44	7.5	9.8	29.7	9
		255/55R19	111Y XL	2403	50	7.5	10.3	30.2	9
	60	255/60R19	113W XL	2535	50	7.5	10.2	31.1	10
18	55	215/55R18	99V XL	1709	50	7.0	8.8	27.4	10
		225/55R18	98V	1653	44	7.0	9.1	27.8	10
		235/55R18	104W XL	1984	50	7.5	9.4	28.2	10
		255/55R18	109W XL	2271	50	8.0	10.4	29.1	12
	60	235/60R18	107W XL	2149	50	6.0	9.5	29.0	10
		245/60R18	105V	2039	44	7.5	9.9	29.6	10
		255/60R18*	112V XL	2469	50	7.5	10.1	30.0	10
		265/60R18	114V XL	2601	50	8.0	10.6	30.5	11
	65	235/65R18	106W	2094	44	7.0	9.4	30.0	10
		255/65R18	111H	2403	44	7.5	10.2	31.0	10
17	60	235/60R17*	102H	1874	44	7.0	9.5	28.0	10
	65	235/65R17	108V XL	2205	50	7.0	9.4	29.0	13
16	65	215/65R16	98H	1653	44	6.5	8.6	27.0	10

* Newly added sizes

TRU-TRAC HT III



TRU-TRAC HT III is the 3rd generation highway terrain tire featuring a symmetric tread pattern with interlocking center blocks, promoting even wear and extending tread life. Its optimized design enhances durability and performance. Additionally, variable-angle siping on the tread blocks creates multiple independent biting edges, improving grip in both dry and wet conditions.



6 YEAR LIMITED WARRANTY




65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



SYMMETRIC TREAD PATTERN WITH INTERLOCKING CENTER BLOCKS.

The uniform, non-directional design promotes even wear throughout the tire's lifespan, contributing to longer tread life. Additionally, the optimized tread design enhances overall durability and performance.




VARIABLE-ANGLE SIPING ON TREAD BLOCKS.

Multiple sipes are integrated into the tread blocks at varying angles, creating numerous independent biting edges. This improves both dry and wet grip performance without compromising ride comfort or highway stability.



REINFORCED SHOULDERS.

The solid, continuous structure of the shoulder blocks ensures constant contact with the road, providing excellent steering response, directional stability at highway speeds, and reduced road noise for a quieter ride.



FOUR WIDE CIRCUMFERENTIAL GROOVES.

Four deep, continuous longitudinal channels efficiently evacuate water away from the tread contact patch, significantly enhancing hydroplaning resistance and maintaining wet-road traction and stability.

P METRIC

TRU-TRAC HT III / UTQG 500 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
17	65	225/65R17	102H	1874	44	6.5	9.0	28.5	11
		245/65R17	111H XL	2403	50	7.0	9.8	29.5	11
	70	245/70R17	110T	2337	44	7.0	9.8	30.6	11
		265/70R17	115H	2679	44	8.0	10.7	31.7	11
16	70	215/70R16	100H	1764	44	6.5	8.7	27.9	11
		235/70R16	106H	2094	44	7.0	9.4	29.0	11
		245/70R16	111H XL	2403	50	7.0	9.8	29.5	11
		265/70R16	112H	2469	44	8.0	10.7	30.6	11
	75	265/75R16	116T	2756	44	7.5	10.5	31.7	11

LT METRIC

TRU-TRAC HT III / M+S

RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
17	70	LT265/70R17	10	121/118S	3195	2910	80	8.0	10.7	31.7	13
	80	LT235/80R17	10	120/117R	3085	2835	80	6.5	9.3	31.8	12
16	75	LT225/75R16	10	115/112S	2680	2470	80	6.0	8.8	29.3	12
		LT265/75R16	10	123/120S	3415	3085	80	7.5	10.5	31.7	13
	85	LT215/85R16	10	115/112R	2680	2470	80	6.0	8.5	30.4	13
		LT235/85R16	10	120/116S	3042	2778	80	6.5	9.3	31.7	12

TRU-TRAC HT II



TRU-TRAC HT II is the 2nd generation highway terrain tire engineered for a quiet, stable, and safe driving experience, particularly under heavy loads. Its unique symmetric tread design minimizes road noise and enhances stability for a more comfortable ride. For superior all-weather safety, the tire features wavy sipes that provide multiple edges for improved wet traction, while wide circumferential and lateral grooves work to evacuate water efficiently, reducing the risk of aquaplaning.



6 YEAR LIMITED WARRANTY




65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



SYMMETRIC TREAD PATTERN WITH INTERLOCKING CENTER BLOCKS.

The uniform, non-directional design promotes even wear throughout the tire's lifespan, contributing to longer tread life. Additionally, the optimized tread design enhances overall durability and performance.



VARIABLE-ANGLE SIPING ON TREAD BLOCKS.

Multiple sipes are integrated into the tread blocks at varying angles, creating numerous independent biting edges. This improves both dry and wet grip performance without compromising ride comfort or highway stability.



REINFORCED SHOULDERS.

The solid, continuous structure of the shoulder blocks ensures constant contact with the road, providing excellent steering response, directional stability at highway speeds, and reduced road noise for a quieter ride.



FOUR WIDE CIRCUMFERENTIAL GROOVES.

Four deep, continuous longitudinal channels efficiently evacuate water away from the tread contact patch, significantly enhancing hydroplaning resistance and maintaining wet-road traction and stability.

P METRIC

TRU-TRAC HT II / UTQG 740 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	50	285/50R20	112V	2469	44	9.0	11.7	31.3	11
19	55	235/55R19	101V	1819	44	7.5	9.6	29.2	11
18	55	225/55R18	102H XL	1874	50	7.0	9.2	27.8	11
	60	235/60R18	103H	1929	44	7.0	9.4	29.1	11
		265/60R18	114H XL	2601	50	8.0	10.7	30.5	11
		285/60R18	116V	2756	44	8.5	11.5	31.5	11
17	65	265/65R17	112H	2469	44	8.0	10.7	30.6	11

UPCOMING SIZES

RIM DIAMETER	SERIES	SIZE	LI/SS
20	55	275/55R20	117HXL
20	60	275/60R20	115H
18	60	225/60R18	104HXL
18	65	265/65R18	114H
18	65	275/65R18	114H
18	70	255/70R18	113H
18	70	265/70R18	116H
17	65	235/65R17	108VXL
16	70	225/70R16	103H
15	75	235/75R15	109HXL

LT METRIC

UPCOMING SIZES

RIM DIAMETER	SERIES	LT	SIZE	LI/SS
18	65	LT	275/65R18	123/120R
	70	LT	275/70R18	125/122S
17	70	LT	285/70R17	121/118S
	75	LT	245/75R17	121/118S
16	75	LT	245/75R16	120/116S
		LT	285/75R16	126/123R

TRU-TRAC HT



True to the Armstrong TRU-TRAC legacy, this Highway Terrain tire provides greater towing ability and increased grip under skidding conditions. An optimized curved tread increases tire rigidity and reduces rolling resistance, while a noise-blocking bar reduces premature wear and road traction noise.



6 YEAR LIMITED WARRANTY




65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE




30-DAY MONEY BACK




A SPECIALLY ENGINEERED TREAD.

A specially engineered tread design provides greater towing ability on highways.



A NOISE-BLOCKING BAR.

A noise-blocking bar on the tire shoulders delays premature wear and reduces noise generated by road traction.



CONTINUOUS OPEN LATERAL CHANNELS.

Continuous open lateral channels increase tire grip under skidding conditions and provide enhanced safety.



AN OPTIMIZED CURVED TREAD PROFILE.

An optimized curved tread profile increases rigidity and reduces rolling resistance.

TRU-TRAC HT / UTQG 740 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	55	275/55R20	117H XL	2833	50	8.5	10.9	31.9	13
	60	275/60R20	115H	2679	44	8.0	10.9	33.0	13
18	60	225/60R18*	104H XL	1984	50	6.5	8.8	28.6	12
		265/60R18	110H	2337	44	8.0	10.6	30.5	13
		285/60R18	116H	2756	44	8.0	11.5	31.5	13
	65	265/65R18	114H	2600	44	7.5	10.7	31.5	12
		255/70R18	113H	2535	44	8.0	10.1	32.0	12
	70	265/70R18	116H	2756	44	7.5	10.8	32.7	12
17	65	225/65R17	102H	1874	44	7.0	9.1	28.4	11
		235/65R17	108V XL	2205	50	7.0	9.4	29.0	11
		245/65R17	107H	2149	44	7.0	9.6	29.4	11
		265/65R17	112H	2469	44	8.0	10.7	30.5	12
	70	245/70R17*	110T	2337	44	7.0	9.6	30.4	12
		265/70R17	115H	2679	44	8.0	10.8	31.7	11
16	65	235/65R16*	103H	1929	44	7.0	9.4	27.9	12
		215/70R16	100H	1764	44	6.5	8.9	27.8	11
	70	225/70R16	103H	1929	44	6.5	9.0	28.4	11
		235/70R16	106H	2094	44	7.0	9.7	29.0	11
		245/70R16	111H XL	2403	50	7.0	9.8	29.4	11
		255/70R16*	111T	2403	44	7.5	10.2	29.9	12
		265/70R16	112H	2469	44	8.0	10.7	30.4	11
	75	265/75R16*	116T	2756	44	7.5	10.5	31.5	12
15	75	235/75R15	109H XL	2271	50	6.5	9.3	28.7	13

* Newly added sizes

TRU-TRAC HT / M+S

RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	65	LT275/65R20*	10	126/123S	3750	3415	80	8.0	10.8	34.1	15
18	65	LT275/65R18	10	123/120R	3415	3085	80	8.0	10.8	32.1	16
	70	LT275/70R18	10	125/122S	3640	3305	80	8.0	10.7	32.8	16
17	70	LT245/70R17*	10	119/116S	3000	2755	80	7.0	9.8	30.4	16
		LT265/70R17	10	121/118T	3195	2910	80	8.0	10.6	31.7	16
		LT285/70R17	10	121/118S	3195	2910	80	8.0	11.3	32.7	16
	75	LT245/75R17	10	121/118S	3195	2910	80	7.0	9.8	31.4	15
	80	LT235/80R17	10	120/117R	3085	2835	80	6.5	9.4	31.8	15
		LT225/75R16	10	115/112T	2680	2470	80	6.0	8.7	29.2	16
16	75	LT245/75R16	10	120/116S	3042	2778	80	7.0	9.8	30.4	16
		LT265/75R16	10	123/120S	3415	3085	80	7.5	10.6	31.6	15
		LT285/75R16	10	126/123R	3750	3415	80	8.0	11.7	32.7	17
		LT215/85R16*	10	115/112S	2680	2470	80	6.0	8.7	30.2	15
	85	LT235/85R16	10	120/116S	3042	2778	80	6.5	9.6	31.6	16

* Newly added sizes

TRU-TRAC AT II



The **TRU-TRAC AT II** is the 2nd generation "All-Terrain" pattern feature a distinctive block pattern design and premium compound, allowing drivers to navigate challenging terrains with ease and confidence. Whether traversing rough or muddy surfaces, this pattern provide a smooth ride and become the leaders on the road.



6 YEAR LIMITED WARRANTY



65K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



A DYNAMIC TREAD DESIGN WITH RIGID SHOULDER BLOCKS.

Has been optimized to withstand impacts and provide superior grip performance in all types of road conditions.




ENGINEERED GROOVES OF DIFFERENT WIDTHS.

Effectively reduced noise levels, resulting in a more comfortable driving experience.



THE REINFORCED SIDEWALL.

Provides a robust defense against any potential damage or side traction occurring in the critical sidewall failure zone.



A SPECIAL RUBBER COMPOUND.

Is utilized to boost the tire's ability to withstand tearing and improves traction and ride comfort both on and off the road.

TRU-TRAC AT II / UTQG 600 A B / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
24	35	305/35R24*	112S	2469	44	11.0	12.3	32.4	13
	40	305/40R22*	114S	2601	44	11.0	12.3	31.6	13
22	45	285/45R22	114H XL	2601	50	9.5	11.1	32.3	13
		305/45R22*	118S XL	2910	50	10.0	11.9	32.9	13
	50	245/50R20*	105H XL	2039	50	7.5	10.0	29.7	13
		255/50R20*	109T XL	2271	50	8.0	10.4	30.1	13
		265/50R20	111T XL	2403	50	8.5	10.5	30.7	12
		305/50R20*	120S XL	3086	50	9.5	12.4	32.0	13
20	55	255/55R20*	110H XL	2337	50	8.0	10.4	31.0	13
		275/55R20*	117T XL	2833	50	8.5	11.2	31.9	13
	60	285/55R20*	116T	2756	44	9.0	11.7	32.4	13
		275/60R20*	115T	2679	44	8.0	11.0	33.0	13
		275/65R20*	116T	2756	44	8.0	11.0	34.1	13
18	55	225/55R18*	102H XL	1874	50	7.0	9.2	27.8	13
		255/55R18*	109H XL	2271	50	8.0	10.4	29.0	13
	60	225/60R18*	104T XL	1984	50	6.5	9.0	28.6	13
		235/60R18*	107T XL	2149	50	7.0	9.4	29.1	13
		245/60R18*	109T XL	2271	50	7.0	9.8	29.6	13
		265/60R18	110T	2337	44	8.0	10.7	30.5	12
		265/60R18*	114T XL	2601	50	8.0	10.7	30.5	12
		285/60R18*	120S XL	3086	50	8.5	11.5	31.5	13
	65	235/65R18*	110T XL	2337	50	7.0	9.4	30.0	13
		265/65R18	114T	2601	44	8.0	10.7	31.5	12
		275/65R18	116T	2756	44	8.0	10.9	31.9	12
	70	255/70R18*	113T	2535	44	7.5	10.2	32.1	13
		265/70R18*	116T	2756	44	8.0	10.7	32.6	13
17	60	225/60R17*	103T XL	1929	50	6.5	9.0	27.6	13
	65	215/65R17*	103T XL	1929	50	6.5	8.7	28.0	13
		225/65R17*	102T	1874	44	6.5	9.0	28.5	12
		235/65R17*	108H XL	2205	50	7.0	9.3	29.0	12
		245/65R17*	111T XL	2403	50	7.0	9.8	29.5	12
		265/65R17	116T XL	2756	50	8.0	10.8	30.5	12
		265/65R17*	112H	2469	44	8.0	10.8	30.5	12
	70	245/70R17*	110T	2337	44	7.0	9.8	30.6	13
		255/70R17*	112T	2469	44	7.5	10.2	31.1	13
		265/70R17*	115T	2679	44	8.0	10.7	31.7	13
		285/70R17	117T	2833	44	8.5	11.5	32.6	13
	75	235/75R17*	108S	2205	44	6.5	9.3	30.9	13
16	70	225/70R16*	103T	1929	44	6.5	9.0	28.4	13
		255/70R16	111S	2403	44	7.5	10.2	29.9	13
		265/70R16*	111T	2403	44	8.0	10.7	30.6	13
	75	245/75R16	111S	2403	44	7.0	9.7	30.3	12
15	75	215/75R15	100S	1764	44	6.0	8.7	27.5	12

* Newly added sizes

P METRIC			
UPCOMING SIZES			
RIM DIAMETER	SERIES	SIZE	LI/SS
22	45	285/45R22	114HXL
18	65	265/65R18	114T
17	65	225/65R17	102T
		235/65R17	108HXL
		245/65R17	111TXL
16	70	215/70R16	104TXL
		235/70R16	109TXL
		245/70R16	111TXL
15	70	265/70R15	116TXL
	75	235/75R15	105S

LT METRIC											
TRU-TRAC AT II / M+S											
RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
24	Flotation	LT35X12.50R24*	12	116R	2755	-	80	10.5	12.4	34.5	17
22	Flotation	LT33X12.50R22*	12	114R	2600	-	80	10.0	12.0	32.8	17
		LT35X12.50R22*	12	121R	3195	-	80	10.0	12.2	34.7	16
	50	LT325/50R22*	12	127S	3860	-	80	9.5	12.8	35.0	16
	55	LT285/55R22*	10	124/121S	3525	3195	80	9.0	11.7	34.4	17
20	Flotation	LT33X12.50R20*	12	119R	3000	-	80	10.0	12.3	32.7	17
		LT35X11.50R20*	10	124R	3525	-	80	9.0	11.6	34.5	17
		LT35X12.50R20*	10	121R	3195	-	65	10.0	12.4	34.5	16
		LT35X12.50R20*	12	125R	3640	-	80	10.0	12.4	34.5	16
		LT35X13.50R20*	12	126R	3750	-	80	11.0	13.7	34.5	16
		LT37X12.50R20*	10	126R	3750	-	65	10.0	12.8	36.5	17
	55	LT275/55R20	10	120/117S	3085	2835	80	8.5	10.9	31.9	15
		LT285/55R20*	10	122/119S	3305	3000	80	9.0	11.7	32.4	17
		LT295/55R20*	10	123/120T	3415	3085	80	9.5	11.8	33.1	16
		LT305/55R20	12	125/122S	3640	3305	80	9.5	12.1	33.4	17
	60	LT265/60R20	10	121/118S	3195	2910	80	8.0	10.4	32.6	17
		LT275/60R20	10	123/120S	3415	3085	80	8.0	10.8	33.1	16
		LT285/60R20	10	125/122S	3640	3305	80	8.5	11.4	33.4	16
		LT295/60R20	10	126/123S	3750	3415	80	8.5	11.5	34.0	17
	65	LT325/60R20*	10	126/123S	3750	3415	65	9.5	13.0	35.4	17
		LT275/65R20*	10	126/123S	3750	3415	80	8.0	11.0	34.1	16
		LT285/65R20*	10	127/124S	3860	3525	80	8.5	11.5	34.6	16
	Flotation	LT295/65R20*	10	129/126S	4080	3750	80	8.5	11.9	35.1	16
		LT35X12.50R18	12	128R	3970	-	80	10.0	12.7	34.5	18
		LT265/65R18	10	122/119Q	3305	3000	80	8.0	10.6	31.6	17
		LT275/65R18	10	123/120S	3415	3085	80	8.0	10.7	32.1	16
		LT285/65R18	10	125/122S	3640	3305	80	8.5	11.7	32.5	15
		LT325/65R18*	10	127/124R	3860	3525	65	9.5	13.3	34.6	16
	70	LT265/70R18	10	124/121Q	3525	3195	80	8.0	10.7	32.6	16
		LT275/70R18	10	125/122S	3640	3305	80	8.0	11.0	33.2	16
		LT295/70R18	10	129/126R	4080	3750	80	8.5	11.8	34.2	16

* Newly added sizes

TRU-TRAC AT II / M+S

RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
17	Flotation	LT33X12.50R17*	12	124S	3525	-	80	10.0	13.0	32.5	16
		LT35X12.50R17*	10	125R	3640	-	65	10.0	12.6	34.4	16
		LT37X12.50R17*	8	124R	3525	-	50	10.0	12.9	36.5	16
	70	LT245/70R17*	10	119/116R	3000	2755	80	7.0	9.9	30.4	16
		LT265/70R17	10	123/120S	3415	3085	80	8.5	10.7	31.8	17
		LT285/70R17	10	126/123S	3750	3415	80	8.5	11.6	32.7	16
		LT295/70R17*	10	128/125R	3970	3640	80	8.5	12.1	33.2	16
		LT305/70R17*	10	125/122R	3640	3305	65	9.0	12.5	33.8	16
		LT315/70R17	8	121/118S	3195	2910	50	9.5	13.1	34.3	16
		LT245/75R17*	10	121/118S	3195	2910	80	7.0	9.8	31.5	17
	75	LT285/75R17	10	128/125R	3970	3640	80	8.0	11.4	33.8	16
		LT235/80R17*	10	120/117R	3085	2835	80	6.5	9.6	31.7	15
	16	70 LT305/70R16*	12	128/125R	3970	3640	80	9.0	12.7	32.7	16
		LT265/75R16*	10	123/120R	3415	3085	80	7.5	10.8	31.6	16
		75 LT285/75R16	10	126/123R	3750	3415	80	8.0	11.7	32.6	15
		LT295/75R16*	10	128/125R	3970	3640	80	8.0	12.0	33.3	16
15	70	LT235/70R15	10	114/110Q	2600	2335	80	7.5	9.6	27.8	16
	75	LT235/75R15	10	116/113Q	2755	2535	80	6.5	9.6	28.7	16

* Newly added sizes

LT METRIC				
UPCOMING SIZES				
RIM DIAMETER	SERIES	SIZE	LI/SS	
20	55	LT 305/55R20	121/118S	
	65	LT 275/65R20	126/123S	
17	70	LT 265/70R17	121/118P	
		LT 285/70R17	121/118R	
	80	LT 235/80R17	120/117R	
16	70	LT 305/70R16	124/121R	
		LT 225/75R16	115/112R	
	75	LT 245/75R16	120/116R	
		LT 265/75R16	123/120Q	
		LT 315/75R16	127/124R	
	85	LT 235/85R16	120/116Q	
15	FLOTATION	LT 31X10.50R15	109Q	

C METRIC			
UPCOMING SIZES			
RIM DIAMETER	SERIES	SIZE	LI/SS
17	70	225/70R17C	108/106S

TRU-TRAC AT



True to the Armstrong TRU-TRAC legacy, this All-Terrain tire provides excellent performance on any road and, under tough conditions, delivers high-speed stability, greater steering response, and maximum comfort. Its design also reduces irregular wear and inhibits block wiggling.



6 YEAR LIMITED WARRANTY




60K MILE WARRANTY



ROAD HAZARD COVERAGE




30-DAY MONEY BACK



FOUR ZIGZAG CIRCUMFERENTIAL GROOVES.

Zigzag grooves provide excellent performance on any road surface.



INTERLOCKING CENTER BLOCKS.

Interlocking center blocks with slanted edges ensure maximum comfort in off-road driving conditions.



RUGGED CASING.

Rugged casing improves high-speed stability and provides greater steering response under tough road conditions.



CONNECTING BRIDGES BETWEEN BLOCKS.

Connecting bridges between shoulder blocks inhibit irregular wear and reduce block wiggling.

P METRIC

TRU-TRAC AT / UTQG 560 A B / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX		MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	55	275/55R20	117T	XL	2833	50	8.5	10.9	31.9	13
	60	275/60R20	116T	XL	2756	50	8.0	10.9	33.0	13
17	70	265/70R17	116T	XL	2756	50	8.0	10.6	31.7	13
16	70	215/70R16	104T	XL	1984	50	6.5	8.8	27.8	13
		225/70R16	107T	XL	2149	50	6.5	8.8	28.3	13
		235/70R16	109T	XL	2271	50	7.0	9.6	29.0	13
		245/70R16	111T	XL	2403	50	7.0	9.8	29.4	11
		265/70R16	116T	XL	2756	50	8.0	10.6	30.5	13
15	70	265/70R15	116T	XL	2756	50	8.0	10.6	29.5	13
	75	235/75R15	109T	XL	2271	50	6.5	9.3	28.7	13

LT METRIC

TRU-TRAC AT / M+S

RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	55	LT285/55R20	10	122/119S	3305	3000	80	9.0	11.2	32.4	15
	60	LT325/60R20	10	126/123R	3750	3415	65	9.5	12.9	35.4	16
17	75	LT245/75R17	10	121/118S	3195	2910	80	7.0	9.8	31.4	15
16	75	LT225/75R16	10	115/112S	2680	2470	80	6.0	8.7	29.2	16
		LT245/75R16	10	120/116S	3042	2778	80	7.0	9.8	30.4	16
		LT315/75R16	10	127/124R	3860	3525	65	9.0	12.6	34.5	17
	85	LT235/85R16	10	120/116S	3042	2778	80	6.5	9.6	31.6	16
15	Flotation	LT31X10.50R15	6	109S	2270	-	51	8.5	10.8	30.3	15

TRU-TRAC RT



TRU-TRAC RT is a high-performance rugged-terrain tire built for SUVs, pickups and 4x4 vehicles. Its open star-like center tread, high-rigidity blocks, deep grooves and multi-sipe design deliver confident traction, wet grip and self-cleaning performance across highways, gravel, sand, mud and rocky terrain. With extra-thick sidewall protection, armor-style sidewall elements, dual sidewall designs and two lettering styles, the TRU-TRAC RT combines durability, aggressive styling and confident everyday drivability.



6 YEAR LIMITED WARRANTY



50K MILEAGE WARRANTY




30-DAY MONEY BACK




RUGGED TERRAIN PATTERN DESIGN.

Designed for SUVs, pickups and 4x4 vehicles, the TRU-TRAC RT delivers a strong balance of on-road stability, off-road grip and aggressive styling.




OPEN STAR-LIKE CENTER TREAD.

The wide, irregular center blocks improve traction on sand, mud, gravel and loose surfaces while supporting strong self-cleaning perform.




HIGH-RIGIDITY TREAD BLOCKS.

Large, reinforced tread blocks improve wear resistance, tear resistance and tread stability, especially under heavy loads, impacts and rough terrain use.



DEEP TRANSVERSE GROOVES.

Wide and deep grooves help evacuate water, mud and debris, improving grip and control on wet, slippery and unpaved roads.



ARMOR-STYLE SIDEWALL PROTRUSIONS.

Raised trapezoidal and rectangular sidewall elements enhance impact protection, mud release and rugged off-road visual appeal.

P METRIC

TRU-TRAC RT / UTQG 500 A B / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
22	40	305/40R22	114T XL	2601	50	11.0	12.3	31.6	13
	45	285/45R22	114T XL	2601	50	9.5	11.2	32.1	13
20	50	265/50R20	111T XL	2403	50	8.5	10.9	30.5	13
	55	275/55R20	117T XL	2833	50	8.5	11.2	31.9	13
	60	275/60R20	115T	2679	44	8.0	11.0	33.0	13
18	65	265/65R18	114T	2601	44	8.0	10.7	31.5	13
17	65	225/65R17	100T	1764	44	6.5	9.0	28.5	13

LT METRIC

TRU-TRAC RT / M+S

RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
24	Flotation	LT33X12.50R24	12	106Q	2095	-	80	11.5	12.6	32.5	19
		LT35X12.50R24	12	116Q	2755	-	80	10.5	12.4	34.5	19
		LT35X13.50R24	12	116Q	2755	-	80	12.0	13.4	34.5	19
		LT37X13.50R24	12	124Q	3525	-	80	11.0	13.4	36.5	19
22	Flotation	LT33X12.50R22	12	114Q	2600	-	80	10.5	12.5	32.5	19
		LT35X12.50R22	12	121Q	3195	-	80	10.0	12.5	34.5	19
20	Flotation	LT33X12.50R20	10	114Q	2600	-	65	10.0	12.5	32.5	19
		LT33X12.50R20	12	119Q	3000	-	80	10.0	12.5	32.5	19
		LT35X12.50R20	10	121Q	3195	-	65	10.0	12.5	34.5	19
		LT35X12.50R20	12	125Q	3640	-	80	10.0	12.5	34.5	19
		LT37X13.50R20	10	127Q	3860	-	65	11.0	13.6	36.5	19
	50	LT265/50R20	10	115/112Q	2680	2470	80	8.5	10.9	30.5	17
		LT285/50R20	10	119/116Q	3000	2755	80	9.0	11.7	31.3	17
	55	LT275/55R20	10	120/117Q	3085	2835	80	8.5	11.2	31.9	17
		LT285/55R20	10	122/119Q	3305	3000	80	9.0	11.7	32.4	17
	60	LT275/60R20	10	123/120Q	3415	3085	80	8.0	11.0	33.0	17
18	Flotation	LT33X12.50R18	10	118Q	2910	-	65	10.0	12.5	32.5	19
		LT35X12.50R18	12	128Q	3970	-	80	10.0	12.5	34.5	19
	70	LT275/70R18	10	125/122Q	3640	3305	80	8.0	11.0	33.2	17
17	Flotation	LT33X12.50R17	10	120Q	3085	-	65	10.0	12.5	32.5	19
		LT35X12.50R17	10	125Q	3640	-	65	10.0	12.5	34.5	19
	70	LT265/65R17	10	120/117Q	3085	2835	80	8.0	10.7	30.6	17
		LT265/70R17	10	123/120Q	3415	3085	80	8.0	10.7	31.7	17
		LT285/70R17	10	126/123Q	3750	3415	80	8.5	11.5	32.8	17
	75	LT315/70R17	10	126/123Q	3750	3415	65	9.5	12.7	34.4	17
		LT245/75R17	10	121/118Q	3195	2910	80	7.0	9.8	31.5	17
	80	LT235/80R17	10	120/117Q	3085	2835	80	6.5	9.3	31.8	17
16	75	LT265/75R16	10	123/120Q	3415	3085	80	7.5	10.5	31.7	17
15	Flotation	LT33X12.50R15	6	108Q	2205	-	35	10.0	12.5	32.5	19
		LT35X12.50R15	6	113Q	2535	-	35	10.0	12.5	34.5	19

DESERT DOG MT



True to the Armstrong TRU-TRAC legacy, this MT tire is built to withstand harsh off-road conditions while providing maximum grip, traction, and pulling power. Rugged sidewalls act as a shield absorbing shock while wide shoulder scallops drain water to help fight hydroplaning.



6 YEAR LIMITED
WARRANTY



30-DAY MONEY
BACK



ZIGZAG STONE EJECTORS.

These stone ejectors are situated between tread blocks to prevent damage from stones and other objects, providing better handling and increasing durability.



TUFF TUSK™ TREAD BLOCKS.

Inspired by the grit of Tuffy the Rhino, these tread blocks provide maximum grip, traction, and pulling power on muddy terrains and other challenging road conditions.



RUGGED SIDEWALL BLOCKS.

With a 3-ply polyester construction, these sidewall blocks act as a shield to protect against shocks from off-road obstacles.



WIDE, ANGLED SHOULDER SCALLOPS.

Designed with a higher void ratio, these shoulder scallops provide great off-road traction, self-cleaning abilities, and better water drainage to fight hydroplaning.



SPECIAL TREAD COMPOUND.

This specially made compound provides enhanced grip on rocks and slippery surfaces while maximizing protection against wear and tear.

DESERT DOG MT / M+S

RIM DIA	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (LBS)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
						PSI	INCHES	INCHES	INCHES	32NDS
20	Flotation	LT33X12.50R20	10	114Q	2600	65	10.0	13.1	32.6	21
		LT33X12.50R20	12	119Q	3000	80	10.0	13.1	32.6	21
		LT35X12.50R20	10	121Q	3195	65	10.0	12.7	34.6	21
		LT35X12.50R20	12	125Q	3640	80	10.0	12.7	34.6	21
		LT37X12.50R20	10	126Q	3750	65	10.0	13.1	36.6	21
		LT37X13.50R20	10	127Q	3860	65	11.0	14.2	36.5	21
		LT38X15.50R20	8	125Q	3640	50	12.0	16.0	37.6	21
18	Flotation	LT35X12.50R18	10	123Q	3415	65	10.0	13.0	34.4	21
		LT35X12.50R18	12	128Q	3970	80	10.0	13.0	34.4	21
17	Flotation	LT35X12.50R17	10	121Q	3195	65	10.0	13.3	34.4	21

TRU-TRAC LT2




TRU-TRAC LT2 is a durable tire designed for performance and longevity. Its two primary robust inner tread blocks offer exceptional traction across various road conditions, while the three wide, robust shoulders help the tire handle heavy loads and maintain smooth cornering and stability. With zigzag circumferential grooves that feature multiple biting edges, the tire provides safe performance on challenging roads.



6 YEAR LIMITED
WARRANTY



60K MILEAGE
WARRANTY



TWO PRIMARY ROBUST INNER TREAD BLOCKS.

Help in providing exceptional traction across all road conditions.




THREE WIDE ROBUST SHOULDERS.

Withstands loads and maintain smooth cornering and stability.



ZIGZAG CIRCUMFERENTIAL GROOVES.

With multiple biting edges designed for safe performance during challenging road conditions.



SPECIAL TREAD COMPOUND.

Ensures reduced energy consumption and enhanced tire lifespan.

TRU-TRAC LT2											
RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
15	70	195/70R15C	8	104/102S	1984	1874	65	6.0	7.9	25.8	11
		205/70R15C	8	106/104T	2094	1984	65	6.0	8.2	26.3	11
		215/70R15C	10	113/111S	2535	2403	76	6.5	8.7	26.9	11
14	75	205/75R14C	8	109/107S	2271	2150	69	5.5	8.0	26.1	11
		215/75R14C	8	112/110T	2469	2337	69	6.0	8.5	26.7	11
12	LTRC	145R12C	8	86/84S	1168	1102	65	4.0	5.7	21.1	10
		155R12C	8	88/86Q	1235	1168	65	4.5	6.2	21.7	10

TRU-TRAC VAN2




TRU-TRAC VAN2 is the 2nd generation LTRC durable tire designed for performance and safety. Its symmetrical tread design and wide footprint provide excellent mileage and stability, especially for heavy loads. With square, wide shoulders, the tire offers enhanced handling and stability in all driving conditions. The wide main circumferential grooves improve safety by increasing control and reducing the risk of hydroplaning.



6 YEAR LIMITED WARRANTY



60K MILEAGE WARRANTY



SYMMETRICAL TREAD DESIGN.

Offers a wider footprint that ensures exceptional mileage and robust performance when carrying heavy loads.




SQUARE WIDE SHOULDERS.

Leads to enhanced road stability, outstanding handling, and safety across all driving conditions.



WIDE MAIN CIRCUMFERENTIAL GROOVES.

Provide safety by increasing the control on hydroplaning.



SPECIAL TREAD COMPOUND.

Ensures reduced energy consumption and enhanced tire lifespan.

TRU-TRAC VAN2 / M+S												
RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH	
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS	
16	65	235/65R16C	10	121/119R	3197	2998	83	7.0	9.5	28.0	11	
15	LTRC	195R15C	8	106/104S	2094	1984	65	5.5	7.8	24.4	11	
14	LTRC	185R14C	8	102/100S	1874	1764	65	5.5	7.4	25.6	11	

UPCOMING SIZES			
RIM DIAMETER	SERIES	SIZE	LI/SS
16	LTRC	205R16C	110/108Q
	65	215/65R16C	109/107T
	70	215/70R16C	108/106T
14	LTRC	195R14C	106/104T
12	LTRC	145R12C	86/84S

TRU-TRAC VAN




This Van tire is designed to provide a quiet, comfortable ride while giving the driver greater traction on both wet and dry roads. The advanced compound allows for increased fuel efficiency.



6 YEAR LIMITED WARRANTY




60K MILEAGE WARRANTY




LARGE SHOULDER BLOCK WITH A NOISE-BLOCKING BAR.

Reducing noise at the shoulder area delays premature wear and reduces sound that is generated by road traction.



INFLECTIONAL VERTICAL GROOVES AND SLANTING HORIZONTAL CHANNELS.

Increases tire grip and shortens braking distance, providing enhanced safety.



SPECIAL COMPOUND.

Designed to resist chipping and tearing, providing excellent durability, delivering longer mileage.

TRU-TRAC VAN / M+S

RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
16	LTRC	205R16C	8	110/108Q	2335	2205	65	6.0	8.5	29.1	10
15	70	215/70R15C	8	109/107T	2270	2150	65	6.5	8.7	27.0	11
		225/70R15C	8	112/110T	2470	2335	65	6.5	9.0	27.6	10
	LTRC	195R15C	8	106/104R	2095	1985	65	5.5	7.8	27.0	11
14	75	205/75R14C	8	109/107S	2270	2150	68	5.0	7.9	26.2	10
	LTRC	185R14C	8	102/100R	1875	1764	65	6.5	7.4	25.4	10
		195R14C	8	106/104S	2095	1985	65	5.5	7.7	26.3	11

UPCOMING VAN

TRU-TRAC VAN3

RIM DIA	ASPECT RATIO	SIZE	LOAD INDEX/SPEED SYMBOL
17	55	225/55R17C	109/107H
	60	215/60R17C	109/107T
	60	195/60R16C	99/97H
16	60	215/60R16C	108/106T
		195/65R16C	104/102T
		205/65R16C	107/105T
	65	215/65R16C	109/107T
		225/65R16C	112/110T
16	65	235/65R16C	115/113T
		235/65R16C	121/119R
		185/75R16C	104/102T
		195/75R16C	107/105T
	75	195/75R16C	110/108R
		205/75R16C	110/108T
		205/75R16C	113/111T
		215/75R16C	113/111T
15	65	225/75R16C	121/119R
		205/65R15C	102/100T
		215/65R15C	104/102T
	70	195/70R15C	104/102T
		215/70R15C	109/107T
14	65	225/70R15C	112/110T
		175/65R14C	90/88T
	70	175/70R14C	95/93T



COMING SOON



An aerial photograph showing a road that splits into two paths. The top path is a dark asphalt road with white dashed lines, flanked by a dense forest of vibrant green evergreen trees. The bottom path is a light-colored, snow-covered road, flanked by a dense forest of snow-laden evergreen trees. A red rectangular banner is positioned on the right side of the image, overlapping the road and the snowy forest.

**ARMSTRONG
ALL-WEATHER TIRES**

BLU-TRAC Flex



BLU-TRAC Flex is engineered as a dependable all-weather tire for American motorists who need one tire to perform across changing weather conditions. Its directional V-shaped tread, dense siping network and angled evacuation grooves work together to deliver confident wet grip, light winter traction, stable handling and comfortable everyday driving performance.



6 YEAR LIMITED WARRANTY



50K MILEAGE WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK



ALL-WEATHER CONTROL.

Directional V-shaped tread design enhances water and slush evacuation for confident year-round performance.



HIGH-DENSITY SIPING.

Multiple biting edges support traction on wet, cold and light snowy roads.



CONFIDENT WET PERFORMANCE WIDE.

angled grooves quickly move water away from the contact patch to reduce aquaplaning risk.



REINFORCED SHOULDER DESIGN.

Strong shoulder blocks support cornering stability and responsive handling.

BLU-TRAC Flex / UTQG 360 A A / M+S 									
RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	45	255/45R20	105W XL	2039	50	8.5	10.0	29.1	11
	40	245/40R19	98W XL	1653	50	8.5	9.8	26.7	11
19	45	225/45R19	96W XL	1565	50	7.5	8.9	27.0	11
		235/45R19	99W XL	1709	50	8.0	9.3	27.4	11
		245/45R19	102W XL	1874	50	8.0	9.6	27.7	11
	55	225/55R19	103V XL	1929	50	7.0	9.2	28.8	11
		235/55R19	105W XL	2039	50	7.5	9.6	29.2	11
		245/55R19	108W XL	2205	50	8.0	10.0	30.0	11
18	40	225/40R18	92Y XL	1389	50	8.0	9.1	25.1	11
		235/40R18	95W XL	1521	50	8.5	9.5	25.4	11
		245/40R18	97W XL	1609	50	8.5	9.8	25.7	11
	45	225/45R18	95W XL	1521	50	7.5	8.9	25.9	11
		235/45R18	98W XL	1653	50	8.0	9.3	26.3	11
		245/45R18	100W XL	1764	50	8.0	9.6	26.7	11
	50	225/50R18	99W XL	1709	50	7.0	9.2	26.9	11
		235/50R18	101V XL	1819	50	7.5	9.6	27.3	11
		245/50R18	104W XL	1984	50	8.0	10.0	28.0	11
	55	225/55R18	99W XL	1709	50	7.0	8.9	27.3	11
		235/55R18	102V XL	1874	50	7.0	9.2	27.8	11
		245/55R18	104W XL	1984	50	7.5	9.6	28.1	11
	60	235/60R18	107V XL	2150	50	7.0	9.4	29.1	11
17	40	215/40R17	87W XL	1202	50	7.5	8.6	23.8	11
		225/40R17	89W XL	1270	50	7.5	8.6	24.3	11
		235/40R17	91W XL	1356	50	7.0	8.4	24.6	11
	45	225/45R17	91W XL	1356	50	7.0	8.4	24.6	11
		235/45R17	94W XL	1477	50	7.5	8.9	25.0	11
		245/45R17	97W XL	1609	50	8.0	9.3	25.4	11
	50	205/50R17	93W XL	1433	50	6.5	8.4	25.1	11
		215/50R17	95W XL	1521	50	7.0	8.9	25.5	11
		225/50R17	98V XL	1653	50	7.0	9.2	25.9	11
	55	205/55R17	95V XL	1521	50	6.5	8.4	25.9	11
		215/55R17	98W XL	1653	50	7.0	8.9	26.3	11
		225/55R17	101W XL	1819	50	7.0	9.2	26.8	11
	60	235/55R17	103V XL	1929	50	7.5	9.6	27.2	11
		245/55R17	106V XL	2094	50	8.0	10.0	28.0	11
		255/55R17	109W XL	2290	50	8.5	10.5	29.0	11
16	45	195/45R16	84V XL	1102	50	6.5	7.7	22.9	11
		205/45R16	87W XL	1202	50	7.0	8.1	23.2	11
		215/45R16	90V XL	1323	50	7.0	8.4	23.6	11
	50	195/50R16	88V XL	1235	50	6.0	7.9	23.7	11
		205/50R16	91V XL	1356	50	6.0	7.9	24.4	11
		215/50R16	94V XL	1477	50	6.5	8.4	24.9	11
	55	205/55R16	94V XL	1477	50	6.5	8.4	24.9	11
		215/55R16	97V XL	1609	50	7.0	8.9	25.3	11
		225/55R16	99W XL	1709	50	7.0	9.2	25.7	11
	60	235/60R16	107V XL	2150	50	7.0	9.4	29.1	11

BLU-TRAC Flex / UTQG 360 A A / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
16	60	195/60R16	93V XL	1433	50	6.0	7.9	25.2	11
		205/60R16	96V XL	1565	50	6.0	8.2	25.7	11
		215/60R16	99V XL	1709	50	6.5	8.7	26.1	11
		225/60R16	102W XL	1874	50	6.5	9.0	26.6	11
		235/60R16	100H	1764	44	7.0	9.4	27.1	11
	65	215/65R16	102V XL	1874	50	6.5	8.7	27.0	11
	70	215/70R16	104H XL	1984	50	6.5	8.7	27.9	11
15	50	195/50R15	86V XL	1168	50	6.0	7.9	22.7	11
	55	185/55R15	82H	1047	44	6.0	7.6	23.0	11
		195/55R15	89V XL	1279	50	6.0	7.9	23.4	11
		165/60R15	77H	908	44	5.0	6.7	22.8	11
	60	185/60R15	88H XL	1235	50	5.5	7.4	23.7	11
		195/60R15	88H	1235	44	6.0	7.9	24.2	11
		175/65R15	84H	1102	44	5.0	7.0	24.0	11
	65	185/65R15	88H	1235	44	5.5	7.4	24.4	11
		195/65R15	91V	1356	44	6.0	7.9	25.0	11
		205/65R15	99V XL	1709	50	6.0	8.2	25.5	11
14	60	165/60R14	75H	853	44	5.0	6.7	21.8	11
		185/60R14	82H	1047	44	5.5	7.4	22.8	11
		155/65R14	75T	853	44	4.5	6.2	22.0	11
	65	165/65R14	79T	963	44	5.0	6.7	22.4	11
		175/65R14	82T	1047	44	5.0	7.0	23.0	11
		185/65R14	86H	1168	44	5.5	7.4	23.5	11
	70	165/70R14	81T	1019	44	5.0	6.7	23.1	11
		175/70R14	88T XL	1235	50	5.0	7.0	23.7	11
		185/70R14	88H	1235	44	5.5	7.4	24.3	11
13	65	155/65R13	73T	805	44	4.5	6.2	20.9	11
	70	145/70R13	71T	761	44	4.5	5.9	21.0	11
		155/70R13	75T	853	44	4.5	6.2	21.6	11
		165/70R13	79T	963	44	5.0	6.7	22.1	11
		175/70R13	82T	1047	44	5.0	7.0	22.7	11
	80	155/80R13	79T	963	44	4.5	6.2	22.8	11

BLU-TRAC VAN Flex



BLU-TRAC VAN Flex is engineered for commercial van users who need dependable all-weather performance with the durability and stability required for daily business use. Its robust multi-rib tread, wide water evacuation grooves and high-density siping work together to deliver confident wet grip, reliable braking, stable handling and improved wear performance throughout the year.



6 YEAR LIMITED
WARRANTY



30K MILEAGE
WARRANTY



ALL-WEATHER SIPING.

High-density sipes create extra biting edges for improved year-round traction.



WET GRIP CONFIDENCE.

Wide circumferential grooves help evacuate water efficiently for dependable wet-road performance.



COMMERCIAL VAN DURABILITY.

Strong tread architecture supports the load and handling demands of van applications.



EVEN WEAR PERFORMANCE.

Balanced footprint design helps promote uniform contact pressure and longer tread life.

BLU-TRAC VAN Flex / M+S 											
RIM DIAMETER	SERIES	SIZE	PR	LOAD & SPEED INDEX	MAXIMUM LOAD (SINGLE)	MAXIMUM LOAD (DUAL)	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
					LBS	LBS	PSI	INCHES	INCHES	INCHES	32NDS
17	60	215/60R17C	8	109/107T	2271	2150	69	6.5	8.7	27.2	13
16	60	195/60R16C	6	99/97H	1709	1609	55	6.0	7.9	25.2	13
		215/60R16C	6	103/101T	1929	1819	55	6.5	8.7	26.1	13
	65	195/65R16C	8	104/102T	1984	1874	69	6.0	7.9	26.0	13
		205/65R16C	8	107/105T	2150	2039	69	6.0	8.2	26.5	13
		215/65R16C	8	109/107T	2271	2150	69	6.5	8.7	27.0	13
		225/65R16C	8	112/110R	2469	2337	69	6.5	9.0	27.5	13
		235/65R16C	10	121/119R	3197	2998	83	7.0	9.4	28.0	13
	75	185/75R16C	8	104/102R	1984	1874	69	5.0	7.2	26.9	13
		195/75R16C	8	107/105R	2150	2039	69	5.5	7.7	27.5	13
		205/75R16C	8	110/108R	2337	2205	69	5.5	8.0	28.1	13
		215/75R16C	8	113/111R	2535	2403	69	6.0	8.5	28.7	13
		225/75R16C	10	121/120R	3197	3086	83	6.0	8.8	29.3	13
		235/75R16C	10	121/120R	3197	3086	83	6.0	8.8	29.3	13
15	65	215/65R15C	6	104/102T	1984	1874	55	6.5	8.7	26.0	13
	70	195/70R15C	8	104/102R	1984	1874	65	6.0	7.9	25.8	13
		205/70R15C	8	106/104R	2094	1984	65	6.0	8.2	26.3	13
		215/70R15C	8	109/107S	2271	2150	65	6.5	8.7	26.9	13
		225/70R15C	8	112/110R	2469	2337	65	6.5	9.0	27.4	13



**ARMSTRONG
WINTER TIRES**

SKI-TRAC PC



This studless winter passenger car tire features both grid-shaped and circumferential grooves to deliver enhanced traction, handling, and water/snow evacuation. Its directional tread, sipe design, and grooves work together to increase safety, grip, and comfort.



6 YEAR LIMITED WARRANTY



ROAD HAZARD COVERAGE




30-DAY MONEY BACK



A UNI-DIRECTIONAL TREAD.

A uni-directional tread with a grid-shaped groove design provides excellent tire grip in winter conditions and rapid evacuation of snow and ice.



OPTIMIZED 3D SIPES.

These optimized 3D sipes offer controlled handling and works ideally in diverse winter weather conditions.



FOUR CIRCUMFERENTIAL GROOVES.

These four circumferential grooves provide enhanced traction, increasing handling on wet, snowy roads.

SKI-TRAC PC / STUDLESS / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
16	55	195/55R16	87H	1201	44	6.0	7.9	24.4	10
		205/55R16	91H	1356	44	6.5	8.4	24.9	10
	60	205/60R16	92H	1389	44	6.0	8.2	25.7	10
		215/60R16	99H XL	1709	50	6.5	8.7	26.1	10
	65	215/65R16	98H	1653	44	6.5	8.7	27.0	10
15	50	195/50R15	86H XL	1168	50	6.0	7.9	22.7	10
	55	185/55R15	86H XL	1168	50	6.0	7.6	23.0	10
		195/55R15	89H XL	1279	50	6.0	7.9	23.4	10
	60	185/60R15	88H XL	1235	50	5.5	7.4	23.7	10
		195/60R15	88T	1235	44	6.0	7.9	24.2	10
	65	185/65R15	88T	1235	44	5.5	7.4	24.4	10
		195/65R15	91T	1356	44	6.0	7.9	25.0	10
	70	195/70R15	91T	1356	44	6.0	7.9	25.0	10
14	55	185/55R14	80H	992	44	6.0	7.6	22.0	10
	60	185/60R14	82T	1047	44	5.5	7.4	22.8	10
		155/65R14	75T	853	44	4.5	6.2	22.0	10
	65	165/65R14	79T	963	44	5.0	6.7	22.4	10
		175/65R14	82T	1047	44	5.0	7.0	23.0	10
	70	165/70R14	81T	1019	44	5.0	6.7	23.1	10
		175/70R14	84T	1102	44	5.0	7.0	23.7	10
13	65	155/65R13	73T	805	44	4.5	6.2	20.9	10
	70	155/70R13	75T	853	44	4.5	6.2	21.6	10
	80	155/80R13	79T	963	44	4.5	6.2	22.8	10

UPCOMING SIZES

RIM DIAMETER	SERIES	SIZE	LI/SS
16	60	195/60R16	89H
		175/65R15	84T
15	65	205/65R15	94H
		205/65R15	99HXL

SKI-TRAC HP



This studless winter ultra-high performance tire is comprised of a unique, specially-made polymer compound designed to maintain high performance and stability during winter conditions. Its V-shaped design allows safe cornering and improved handling at high speeds, while the 3D shoulder sipes provide increased traction on snowy roads.




6 YEAR LIMITED WARRANTY



ROAD HAZARD COVERAGE



30-DAY MONEY BACK




A V-SHAPED DESIGN.

An optimal V-shaped tread design allows for safe cornering and better handling at high speeds on wintry roads.



SPECIAL 3D SIPES.

These special shoulder sipes increase snow traction by creating extra biting edges.



EXTRAORDINARY POLYMER COMPOUND.

This unique polymer compound delivers excellent grip in dynamic winter conditions, ensuring high performance and stability.

SKI-TRAC HP / STUDLESS / M+S

RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI				32NDS
19	45	245/45R19	102V XL	1874	44	8.0	9.6	27.7	10
18	40	225/40R18	92V XL	1389	50	8.0	9.1	25.1	10
		245/40R18	97V XL	1609	50	8.5	9.8	25.7	10
	45	245/45R18	100V XL	1764	50	8.0	9.6	26.7	10
17	45	225/45R17	94V XL	1477	50	7.5	8.9	25.0	10
	50	205/50R17	93V XL	1433	50	6.5	8.4	25.1	10
		225/50R17	98V XL	1653	50	7.0	9.2	25.9	10
	55	205/55R17	95V XL	1521	50	6.5	8.4	25.9	10
		215/55R17	98V XL	1653	50	7.0	8.9	26.3	10
		225/55R17	101V XL	1819	50	7.0	9.2	26.8	10
		215/60R17	96H	1565	44	6.5	8.7	27.2	11
	60	215/60R17	96H	1565	44	6.5	8.7	27.2	11
16	55	215/55R16	97H XL	1609	50	7.0	8.9	25.3	10

UPCOMING SIZES

RIM DIAMETER	SERIES	SIZE	LI/SS
19	40	245/40R19	98V
18	40	235/40R18	95V
	45	225/45R18	95V
		235/45R18	98V
17	45	215/45R17	91V
		235/45R17	97H
		235/45R17	97V
	50	215/50R17	95V
		235/50R17	100V
		225/55R16	99H
16	55	225/55R16	99V

SKI-TRAC S



The distribution of studs is designed to minimize noise and enhance the studs' effectiveness on ice. The rigid center part pattern geometry enables quick and precise steering response. Additionally, the high density of sipes enhances traction on snow. The tire construction incorporates design choices that provide a well-balanced driving experience in harsh winter conditions as well as during the changing weather of autumn and spring. Special attention has been given to reducing noise through optimized layer gauges. The tread compound utilizes advanced polymers that are specifically optimized for low temperatures, working in conjunction with silica-silane filler interaction to ensure safe and smooth travel in all weather conditions.




6 YEAR LIMITED
WARRANTY



ROAD HAZARD
COVERAGE




30-DAY MONEY
BACK




OPTIMIZED STUD DISTRIBUTION.

Designed to minimize noise and enhance the studs' effectiveness on ice.




RIGID CENTER TREAD PART WITH HIGH SIPE DENSITY.

Provides fast and precise steering response with improves traction on snow.



IMPROVED CONSTRUCTION.

Provide a well-balanced driving experience in harsh winter conditions as well as during the changing weather of autumn and spring.



ADVANCED COMPOUND POLYMERS.

Specifically optimized for low temperatures, working in conjunction with silica-silane filler interaction to ensure safe and smooth drive in all weather conditions.

SKI-TRAC S / STUDDABLE / M+S


RIM DIAMETER	SERIES	SIZE	LOAD & SPEED INDEX	MAXIMUM LOAD	MAX. INFLATION PRESSURE	RIM WIDTH	SECTION WIDTH	OVERALL DIAMETER	TREAD DEPTH
				LBS	PSI	INCHES	INCHES	INCHES	32NDS
20	50	285/50R20	116T XL	2756	51	9.0	11.7	31.3	12
		235/55R20	102T	1874	44	7.5	9.6	30.2	12
	55	255/55R20	110T XL	2337	51	8.5	12.3	34.6	12
		265/55R20	113T XL	2535	44	8.5	12.3	34.6	12
19	45	245/45R19	102T XL	1874	51	8.0	9.6	27.7	12
	50	255/50R19	107T XL	2149	51	8.0	10.4	29.1	12
	55	225/55R19	103T XL	1929	51	7.0	9.2	28.8	12
		235/55R19	105T XL	2039	51	7.5	9.6	29.2	12
18	45	225/45R18	95T XL	1521	51	7.5	8.9	25.9	12
		235/45R18	98T XL	1653	51	8.0	9.3	26.3	12
		215/55R18	99T XL	1709	51	7.0	8.9	27.3	12
	55	225/55R18	102T XL	1874	51	7.0	9.2	27.8	12
		235/55R18	104T XL	1984	51	7.5	9.6	28.1	12
		225/60R18	104T XL	1984	51	6.5	9.0	28.6	12
	60	235/60R18	107T XL	2149	51	7.0	9.4	29.1	12
		265/60R18	114T XL	2601	51	8.0	10.7	30.5	12
		285/60R18	116T	2756	44	8.5	11.5	31.5	12
	65	235/65R18	110T XL	2337	51	7.0	9.4	30.0	12
		265/65R18	114T	2601	44	8.0	10.7	31.5	12
17	45	225/45R17	94T XL	1477	51	7.5	8.9	25.0	12
	50	215/50R17	95T XL	1521	51	7.0	8.9	25.5	12
		225/50R17	98T XL	1653	51	7.0	9.2	25.9	12
		215/55R17	98T XL	1653	51	7.0	8.9	26.3	12
	55	225/55R17	101T XL	1819	51	7.0	9.2	26.8	12
		235/55R17	103T XL	1929	51	7.5	9.6	27.2	12
	60	215/60R17	100T XL	1764	51	6.5	8.7	27.2	12
		225/60R17	103T XL	1929	51	6.5	9.0	27.6	12
		215/65R17	103T XL	1929	51	6.5	8.7	28.0	12
	65	225/65R17	106T XL	2094	51	6.5	9.0	28.5	12
		235/65R17	108T XL	2205	51	7.0	9.4	29.1	12
		265/65R17	116T XL	2756	51	8.0	10.7	30.6	12
16	55	195/55R16	91T XL	1356	51	6.0	7.9	24.4	12
		205/55R16	94T XL	1477	51	6.5	8.4	24.9	12
	60	205/60R16	96T XL	1565	51	6.0	8.2	25.7	12
		215/60R16	99T XL	1709	51	6.5	8.7	26.1	12
	65	205/65R16	95T	1521	44	6.0	8.2	26.5	12
		215/65R16	102T XL	1874	51	6.5	8.7	27.0	12

UPCOMING SIZES			
RIM DIAMETER	SERIES	SIZE	LI/SS
22	40	275/40R22	107TXL
		285/40R22	110TXL
	45	285/45R22	114TXL
		265/50R22	115TXL
21	40	285/40R21	109TXL
		295/40R21	111TXL
		315/40R21	115TXL
	45	275/45R21	110TXL
		285/45R21	113TXL
		275/50R21	113TXL
20	35	275/35R20	102TXL
		275/40R20	106TXL
		245/45R20	103TXL
	45	275/45R20	110TXL
		245/50R20	105TXL
	50	265/50R20	111TXL
		275/50R20	113TXL
19	55	245/55R19	107TXL
		255/55R19	111TXL
		265/55R19	113TXL
	45	245/45R18	100TXL
18	50	225/50R18	99TXL
	55	255/55R18	109TXL
17	50	205/50R17	93TXL

UPCOMING WINTER

SKI-TRAC SU


RIM DIA	SERIES	SIZE	LOAD INDEX/SPEED SYMBOL	
18	55	225/55R18	102H	XL
		225/55R18	102V	XL
		235/55R18	104H	XL
	60	225/60R18	104H	XL
		225/60R18	104V	XL
		235/60R18	107H	XL
		235/60R18	107V	XL
	17	55	235/55R17	103V
225/60R17			99V	
60		225/60R17	103H	XL
		235/60R17	106H	XL
65		225/65R17	102H	
		225/65R17	106H	XL
		235/65R17	108H	XL
		16	60	235/60R16
235/60R16	104H			XL
70	215/70R16		100H	

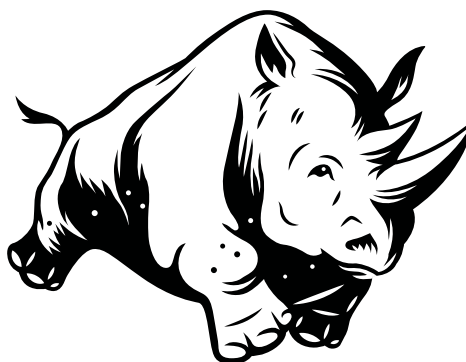

COMING SOON

SKI-TRAC VAN

RIM DIA	SERIES	SIZE	LOAD INDEX/SPEED SYMBOL	
17	60	215/60R17C	109/107T	
		215/60R16C	103/101R	
		215/60R16C	108/106R	
	65	205/65R16C	107/105T	
		215/65R16C	109/107R	
		225/65R16C	112/110R	
		235/65R16C	115/113R	
	75	235/65R16C	121/119R	
		185/75R16C	104/102R	
		195/75R16C	107/105S	
16	70	195/75R16C	110/108R	
		205/75R16C	113/111S	
		225/75R16C	121/120R	
		195/70R15C	104/102S	
		205/70R15C	106/104S	
		215/70R15C	109/107S	
15	70	225/70R15C	112/110S	

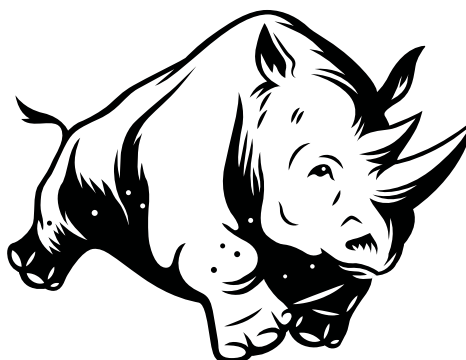

COMING SOON

TUFF 360 WARRANTY PROGRAM

ABOUT TUFF 360® WARRANTY

This limited warranty only applies to the original purchaser of new Armstrong brand replacement radial tires, supplied either directly or through an authorized Armstrong dealer, which are mounted on passenger cars, vans, and light trucks and have been used on the same vehicle they were originally installed on.

This warranty applies to consumers purchasing and using the tires in all of the United States (including Puerto Rico; excluding Guam and the U.S. Virgin Islands), and Canada.

WHAT IS COVERED BY THE TUFF 360® WARRANTY?

The Armstrong tire Warranty offers the following benefits:

I. WORKMANSHIP AND MATERIALS WARRANTY

II. MILEAGE TREADWEAR WARRANTY

III. ROAD HAZARD REPLACEMENT PROGRAM

IV. 30-DAY MONEY BACK GUARANTEE, NO QUESTIONS ASKED

BENEFIT I WORKMANSHIP & MATERIALS WARRANTY

All Armstrong tires are warranted against defects in workmanship and material and will be replaced 100 % free of charge for the initial warranty period, which is the first 2/32" of the original usable tread, or within twelve (12) months from the date of purchase (proof of purchase required), whichever comes first.

Applicable fees, taxes, and costs of mounting and balancing are payable by the owner.

After the 100 % replacement term expires and the tire is still within six (6) years from the date of purchase (proof of purchase required), credit will be pro-rated towards the purchase of a comparable Armstrong tire. The credit will be determined by

the percentage of original tread depth remaining on the tire and the current Armstrong price in effect at the time of adjustment. Applicable fees, taxes, and costs of mounting and balancing are payable by the owner.

REFER TO THE EXAMPLE BELOW TO OBTAIN THE CREDIT PERCENTAGE.

RTD = Remaining Tread Depth OTD = Original Tread Depth
If RTD = 5/32" = 5 and OTD = 10/32" = 10

THE CALCULATION IS:

$$\frac{\text{Remaining Usable Tread Depth (5-2)}}{\text{Original Usable Tread Depth (10 - 2)}} = \frac{3}{8} = 0.375 = 38\%$$

BENEFIT II MILEAGE TREADWEAR WARRANTY

Most patterns manufactured by Armstrong tire are covered by a mileage warranty from the point of original purchase (proof of purchase required). If a tire reaches the end of its usable tread life (2/32") before the stated mileage warranty, it will be replaced by a comparable Armstrong tire on a pro-rated basis. The adjustment cost will be determined by multiplying the percentage of mileage obtained by the current Armstrong price in effect at the time of adjustment. Applicable fees, taxes, and costs of mounting and balancing are payable by the owner.

TO BE ELIGIBLE FOR ARMSTRONG'S MILEAGE TREADWEAR WARRANTY, THE FOLLOWING CONDITIONS APPLY:

1. The tires must be rotated every 5,000 – 6,000 miles.
2. The owner must be the original purchaser of the tires and have the original copy of the invoice showing the mileage at installation.
3. The original purchaser must be the owner of the vehicle on which the tires were originally installed.
4. The tires are worn out evenly across the tread, down to the treadwear indicator (2/32") at which time they are considered to be 100 % worn out. The tire must not have more than 2/32" tread depth difference.
5. The Tire Rotation Card (included) must be completed by the servicing dealer.
6. For vehicles equipped with staggered size fitments (different tire sizes on the front and rear axles) which cannot be rotated, the mileage warranty for the front or rear tires will be 50 % of the warranted miles specified under the standard Armstrong treadwear warranty.

CATEGORY	PATTERN	MILEAGE COVERED (MILES)
PCR All Season	BLU-TRAC PC3	85K
PCR All Season	BLU-TRAC PC2	85K
-	BLU-TRAC PC2 (CLASSIC CARS)	35K
PCR All Season	BLU-TRAC PC	85K
UHP All Season	BLU-TRAC HP3	45K
UHP Summer	BLU-TRAC HP2	45K
UHP All Season	BLU-TRAC HP	45K
SUV All Season	TRU-TRAC SU3	65K
SUV All Season	TRU-TRAC SU2	65K
SUV All Season	TRU-TRAC SU	65K
4x4 HT	TRU-TRAC HT III	65K
4x4 HT	TRU-TRAC HT II	65K
4x4 HT	TRU-TRAC HT	65K
4x4 AT	TRU-TRAC AT II	65K
4x4 AT	TRU-TRAC AT	60K
4x4 RT	TRU-TRAC RT	50K
4x4 MT	DESERT DOG MT	-
LTRC	TRU-TRAC LT2	60K
LTRC	TRU-TRAC Van2	60K
LTRC	TRU-TRAC Van	60K
PCR/UHP/SUV All Weather	BLU-TRAC FLEX	50K
LTRC All Weather	BLU-TRAC Van FLEX	30K
Studless Winter PCR	SKI-TRAC PC	-
Studless Winter UHP	SKI-TRAC HP	-
Studdable Winter	SKI-TRAC S	-

BENEFIT III ROAD HAZARD REPLACEMENT PROGRAM

TUFF 360® offers a road hazard warranty that protects the consumer against non-repairable damage caused by cuts, punctures, snags, and bruises, or impact damages caused by potholes, curbs or other objects on the road.

This Road Hazard Program is included with new Armstrong BLU-TRAC PC3, BLU-TRAC PC2, BLU-TRAC PC2 (CLASSIC CARS), BLU-TRAC PC, BLU-TRAC HP3, BLU-TRAC HP2, BLU-TRAC HP, TRU-TRAC SU3, TRU-TRAC SU2, TRU-TRAC SU, TRU-TRAC HT III, TRU-TRAC HT II, TRU-TRAC HT, TRU-TRAC AT II, TRU-TRAC AT, BLU-TRAC FLEX, SKI-TRAC PC, SKI-TRAC HP, SKI-TRAC S and light truck tires sold by tire retailers and is administered by ZAFCO International ("Program Administrator").

NOTE: Commercial-use or off-road use of these tires are excluded from the Program.

A. WHAT ARE THE TERMS?

This Program covers eligible Armstrong tires for a term of 24 months from the date on the original purchase invoice for the tires, or until any part of the tire tread that comes in contact with the road has a tread depth of 2/32" or less, whichever occurs first.

The Terms are as follows:

Covered tires will be eligible for a free replacement for first two years from the date of purchase.

This Program covers only the new Armstrong passenger or light truck tires named above that are (i) purchased by the consumer, from a tire retailer selling Armstrong tires, and (ii) that are listed clearly on the original invoice, identified by tire brand, type, size and the part/SKU number(s), (iii) while installed on the vehicle identified by year, make, model, and mileage on the original purchase invoice ("Eligible Armstrong Tires").

B. WHAT IS ROAD HAZARD DAMAGE?

Road hazard damage occurs when a tire fails as a result of a puncture, bruise, or impact break incurred during the course of normal driving on a road maintained by state or local authority. Nails, glass and potholes are the most common examples of road hazards.

C. WHAT ARE THE BENEFITS?

This Program provides reimbursement for flat tire repair and/or tire replacement, up to the original purchase price of the tire or the replacement tire price, whichever is less, not to exceed a maximum of \$200.00 during the Term, when an eligible Armstrong tire is damaged by a road hazard ("Benefit Limit").

1. **FLAT TIRE REPAIR:** If, during the Term, an eligible Armstrong tire is damaged due to a covered road hazard and can be safely repaired per industry standards and guidelines, the tire may be repaired by any Servicing Facility. The permanent patch/ plug and the labor to perform the repair will be covered up to \$20.00 per tire per occurrence. Balancing is not covered. The consumer is responsible for any additional charges including, but not limited to shop supplies. The Program will remain in effect for the repaired tire for the remainder of the Term. It is not necessary to contact the Program Administrator before having a flat tire repaired.

2. **TIRE REPLACEMENT:** If, during the Term, an eligible Armstrong tire is damaged due to a covered road hazard, the damaged tire will be replaced with an exact make/model of tire if available. If not available, a comparable quality tire will be installed.

When an eligible Armstrong tire failure occurs in the first twelve (12) months of ownership, the eligible Armstrong tire will be replaced with reimbursement up to the Benefit Limit. When an eligible Armstrong tire fails after the first twelve (12) months of ownership, the consumer is responsible for 50 % of the original purchase price of that tire. For example, if the original price of the eligible Armstrong tire was \$100, and it is damaged in the 18th month of ownership, the portion of the replacement cost is 50 % of the original purchase price of the Eligible Armstrong Tire, \$50.00. In no event shall 100% coverage exceed the Benefit Limit.

The consumer is responsible for any additional charges including, but not limited to, mounting, balancing, taxes and miscellaneous fees.

D. WHAT ARE THE LIMITATIONS?

- Under no circumstances will the eligible reimbursement amount exceed the Benefit Limit of \$200.
- The consumer must pay for all charges incurred for service, repair, and/or replacement and submit a claim for reimbursement of eligible expenses.
- The Program Administrator reserves the right to limit reimbursement to the generally accepted retail replacement costs.

WHAT TO DO IN CASE OF A ROAD HAZARD CLAIM

1. IF YOU ARE THE SERVICING FACILITY.

In the case of claims related to road hazard, the Servicing Facility or Authorized Retailer of the eligible Armstrong tires must contact the Program Administrator at claims@zafco.com for prior authorization (not required for flat tire repair, applicable to tire replacement only).

NOTE: All reimbursements for claims are made directly to the consumer. However, if the Servicing Facility is willing to accept payment directly from the Program Administrator, please submit the required claim documents as specified below.

2. IF YOU ARE THE CONSUMER.

For all claim reimbursements including flat tire repair and tire replacement related to road hazards, you must:

1. TAKE YOUR VEHICLE TO:

- (1) The original facility where you purchased your Armstrong tires,
- (2) to an authorized Armstrong retailer, or (3) to the nearest tire servicing facility. The servicing facility must contact the program administrator at claims@zafco.com for prior authorization and to obtain a claim number (not required for flat tire repair, applicable to tire replacement only).

2. HAVE PROPER DOCUMENTATION READY.

2.1. A copy of the original invoice showing the purchase of your Armstrong tires including:

- I. Tire servicing facility name, address and phone number
- II. Your name, address, and signature
- III. Year/make/model and mileage of vehicle
- IV. Brand, type, and size of tire(s)

2.2. A signed copy of the paid repair or replacement invoice, including:

- I. Tire servicing facility name, address and phone number.
- II. Your name, address, and signature.
- III. Brand, type, size and purchase price of the replacement tire.
- IV. Year/Make/Model of Vehicle.

3. SEND REQUIRED DOCUMENTS TO

claims@zafco.com, by fax to (305) 906-3811 or postal mail to Armstrong Tire/ ZAFCO, 4220 W. 104th Street, Suite 11, Hialeah, FL 33018

IMPORTANT REMINDERS.

- You must pay for all charges incurred for service, repair, and/or replacement and submit a claim for reimbursement of eligible expenses as described above.
- You are responsible for your portion of the replacement cost, if any, and any and all other charges not covered by this Program.
- For assistance changing a flat tire, you may contact your own service provider.
- Tires being replaced under the Program must be surrendered to the Servicing Facility.
- Tires being replaced under the Program must be made available for inspection if requested by the Servicing Facility.
- If a tire needs to be replaced and authorization cannot be obtained because the damage has occurred outside of the Program Administrator's normal business hours. In order to be eligible for reimbursement: (1) you must go to the original facility where you purchased your Armstrong tires, or to an authorized Armstrong retailer, or to the nearest tire servicing facility; (2) if replaced, the damaged tire must be retained, and after must ensure disposal of waste tire to a lawful place AND

(3) The Program Administrator must be contacted at claims@zafco.com. There is no guaranteed eligibility.

BENEFIT IV

30-DAY MONEY BACK GUARANTEE, NO QUESTIONS ASKED

TUFF 360® offers a 30-day trial period for all Armstrong tires purchased as replacement tires in the United States and Canada (commercial use excluded). Eligible Armstrong tires may be returned within 30 days from the date of purchase for a full refund (including the cost of mounting and balancing of up to \$10.00 per tire, as well as applicable taxes).

The tires must be returned to the retailer from which they were purchased with the original sales invoice.

GENERAL EXCLUSIONS

The trial offer applies only to the original purchased set of four tires. Tires are not eligible for a refund if:

- Tires have been used in motorsports activities or competitive events.
- Tires have been transferred from the vehicle on which they were originally installed.
- There is a road hazard or injury such as: damage caused by obstacles or debris, cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.
- There is damage or failure resulting from improper operation or maintenance such as: operating while flat or severely under-inflated, improper application of tire size and/or specification, improper mounting/ dismounting procedures or tire/wheel assembly balance; load, speed and inflation practices causing excessive operational temperatures that exceed tires' capabilities, damage caused by tire repair.
- There is damage or failure resulting from: damaged rim or chain damage; wheel alignment or brake problems, mechanical irregularities in the vehicle or wheel, negligence, misuse and abusive driving, including but not limited to spinning, racing or accident damage.
- The tires have more than 1/32" (0.8mm) treadwear.

WHAT IS NOT COVERED BY THE TUFF 360® WARRANTY?

- Ride disturbances that occur after the first 2/32" of treadwear.
- Replacement of (3) three or more tires from the same vehicle.
- This warranty applies to consumers purchasing and using the tires in all of the United States (including Puerto Rico; excluding Guam and the U.S. Virgin Islands), and Canada.
- Tires worn beyond the treadwear indicators (less than 2/32" remaining tread).
- The cost of mounting and balancing and applicable taxes and fees (except when specified).
- Tire damage or irregular wear due to:
 - > Continued use while run flat or under acute under-inflation.
 - > Improper repair, or with repairs not conforming to the Rubber Manufacturers' Association standards, or with section repairs, or with self-vulcanizing plug only.
 - > Improper use or operation, including, but not limited to: over inflation, overloading, contamination or degradation by petroleum products or other chemicals, tire chain damage, use for racing or competitions, excessive off-road use, or willful damage or abuse.
 - > Improper or insufficient maintenance, including, but not limited to: misalignment, wheel imbalance, defective brakes or shock absorbers, improper mounting or demounting, or other vehicle conditions.
 - > Failure to rotate the tire at least every 5,000 – 6,000 miles.
 - > Tires with the D.O.T identification number removed or rendered illegible.
- Tires that are:
 - > Installed on any other vehicle other than the vehicle of original installation.
 - > Acquired as used tires or purchased by somebody other than you.

- Ozone or weather cracking on tires purchased over four (4) years from date of purchase (proof of purchase is required).
- Damage incurred outside the United States and Canada.
- Tire repairs or replacements made by anyone other than a Tire Servicing Facility, its agents, contractors or licensees.
- Repair, replacement, or flat tire changing assistance for tires that are not: (1) purchased by the Consumer, from an authorized Armstrong Tire retailer, and (2) clearly listed on the original purchase invoice; (3) identified by the tire brand, type, size, and the part/SKU numbers; (4) while installed on the vehicle identified by year, make, and model on the original purchase invoice; and (5) damaged while installed on the vehicle.
- Repair or replacement of tires that:
 - > Have been repaired in a manner other than per tire manufacturer guidelines and industry approved methods.
 - > Have been re-treaded, re-capped, re-grooved, remolded, or tubed.
- Repair or replacement of any tire(s) used or installed on vehicles with a manufacturer's load rating capacity greater than one-ton.
- Repair or replacement of any tire(s) used or installed on vehicles with a load capacity of one-ton or greater designed for, built for or used in a private recreational or commercial application including but not limited to Class A (or Type A) Motor Homes and Class C (or Type C) Motor Homes.
- Repair or replacement of any tire(s) used or installed on motorcycles, trailers, or on vehicles used for competitive driving or racing, police or emergency service, snow removal, carriage of passengers for hire, commercial towing, construction, or postal service.
- Repair or replacement of any tire(s) used or installed on vehicles used for farming, ranching, or agriculture, and vehicles that are registered to or licensed under a farm or ranch.
- Repair or replacement of tire pressure monitoring systems (TPMS) and/or devices and components associated with TPMS.
- Fees charged by the roadside assistance provider when (1) the driver is not with the Covered Vehicle when the roadside assistance provider arrives; (2) the Covered Vehicle is not at the location given to the dispatcher when the roadside assistance provider arrives; or (3) if the consumer does not call back to cancel the requested service within the window given by the roadside assistance provider.
- Tire alteration of any manner, including, but not limited to: siping, buffing, stud pin holes, regrooving, or additives.
- Any other damage caused by user's actions or omissions not in conformity with vehicle manufacturer's specifications or instructions.

WHERE TO GO FOR WARRANTY REPLACEMENT

Whenever possible you should return your vehicle to the original facility you purchased your Armstrong tires from. If you are unable to return to the original servicing facility, you can locate an authorized dealer at armstrongtire.com/dealer-locator.

HOW TO FILE A CLAIM

DEALER'S OBLIGATION

In order to claim an adjustment from Armstrong Tire for claims related to I. Workmanship and Materials Warranty and II. Mileage Treadwear Warranty, the dealer must:

- 1.** Fill out a "Claim Adjustment Form"
- 2.** Email the completed form to claims@zafco.com along with three medium resolution pictures of the following:
 - Serial and DOT number, labeled as 1-1.
 - Claim condition, labeled as 1-2.
 - Complete tire with the tread portion clearly visible, labeled as 1-3 and so forth.
 - Mileage Warranty & Tire Rotation Card (applicable to mileage related adjustments only)

IN ORDER TO CLAIM REIMBURSEMENT FOR A REFUND RELATED TO IV. 30-DAY MONEY BACK GUARANTEE, THE DEALER MUST:

1. Fill out a "Claim Adjustment Form" with a description about the reason for return.
2. Email the completed form to claims@zafco.com along with a copy of the original purchase invoice of the tires showing:
 - Armstrong Tire retailer name, address and phone number.
 - Year/make/model and mileage of vehicle.
 - Brand, type, and size of tire(s).
 - DOT number(s).

All claims will be processed within 30 days. Once approved, credit will be issued for the original purchasing price of the tire(s). In the case of a refund related to the 30-DAY MONEY BACK GUARANTEE, the cost of mounting and balance up to \$10.00, and applicable taxes will also be reimbursed.

CONSUMER'S OBLIGATION

IN ORDER TO BE ELIGIBLE FOR BENEFITS OFFERED BY THE TUFF 360™ WARRANTY, THE CONSUMER MUST:

1. Present the tire to an authorized Armstrong retailer (or the original facility the tires were purchased from, wherever possible).
2. Present a copy of the original purchase invoice with the documented automobile mileage at the time of tire installation.
3. Present a tire rotation record showing that all tires have been rotated at least every 5,000 – 6,000 miles (applicable to mileage warranty claims only).
4. Pay the amount due on a replacement tire (if any), including taxes, mounting and balancing charges and/or the cost of other services, less the amount of credit.
5. For claims related to Road Hazard, please see specific instructions stated in section titled "WHAT TO DO IN CASE OF A ROAD HAZARD CLAIM".

Summary of Armstrong Tire Tuff 360® Warranty Program

CATEGORY	PATTERN	6 YEAR WORK-MANSHIP	ROAD HAZARD	MILEAGE COVERED (MILES)	30 DAY TRIAL
PCR All Season	BLU-TRAC PC3	YES	YES	85K	YES
PCR All Season	BLU-TRAC PC2	YES	YES	85K	YES
-	BLU-TRAC PC2 (CLASSIC CARS)	YES	YES	35K	YES
PCR All Season	BLU-TRAC PC	YES	YES	85K	YES
UHP All Season	BLU-TRAC HP3	YES	YES	45K	YES
UHP Summer	BLU-TRAC HP2	YES	YES	45K	YES
UHP All Season	BLU-TRAC HP	YES	YES	45K	YES
SUV All Season	TRU-TRAC SU3	YES	YES	65K	YES
SUV All Season	TRU-TRAC SU2	YES	YES	65K	YES
SUV All Season	TRU-TRAC SU	YES	YES	65K	YES
4x4 HT	TRU-TRAC HT III	YES	YES	65K	YES
4x4 HT	TRU-TRAC HT II	YES	YES	65K	YES
4x4 HT	TRU-TRAC HT	YES	YES	65K	YES
4x4 AT	TRU-TRAC AT II	YES	YES	65K	YES
4x4 AT	TRU-TRAC AT	YES	YES	60K	YES
4x4 RT	TRU-TRAC RT	YES	NO	50K	YES
4x4 MT	DESERT DOG MT	YES	NO	-	YES
LTRC	TRU-TRAC LT2	YES	NO	60K	NO
LTRC	TRU-TRAC Van2	YES	NO	60K	NO
LTRC	TRU-TRAC Van	YES	NO	60K	NO
PCR/UHP/SUV All Weather	BLU-TRAC FLEX	YES	YES	50K	YES
LTRC All Weather	BLU-TRAC Van FLEX	YES	NO	30K	NO
Studless Winter PCR	SKI-TRAC PC	YES	YES	-	YES
Studless Winter UHP	SKI-TRAC HP	YES	YES	-	YES
Studdable Winter	SKI-TRAC S	YES	YES	-	YES

SAFETY WARNING

Armstrong makes your safety our top priority. It is essential for you to ensure proper use and maintenance of your tires to avoid any serious injury. Here are some safety tips we recommend to mitigate your risk of tire failure:

- Owners must continue to rotate tires in accordance to their vehicle owner's manual or every 5,000 – 6,000 miles.
- Tires should be regularly inspected by a qualified tire professional for any signs of damage.
- Tires should be mounted only by trained professionals. Follow all instructions in the vehicle owner's manual or tire placard in vehicle to avoid under-inflation, overloading and misapplication.
- Use approved rims and wheels only.
- Do not spin tires on slippery surfaces such as snow, ice, or mud, or spin in excess of 35 mph (56 kph), as indicated on the speedometer.
- We recommend replacing any tires that are beyond (10) ten years from their date of manufacture. If your vehicle manufacturer has specific recommendations for tire replacement, you should follow the specific recommendations for that vehicle.
- Always avoid purchasing used tires. Previous usage may have damaged internal components that may lead to tire failure.
- We recommend replacing all four tires at the same time. However, when only two are replaced, the new tires should be installed on the rear since deeper tread may provide better grip and water evacuation in wet conditions.
- We recommend routine air pressure checks as per your vehicle manufacturer's specifications.

Any tire, no matter how well constructed, may fail in use as a result of damage or misuse. If you experience any vibrations or ride disturbances, or notice a bulge, bump, or any kind of irregularities, we recommend having your tires evaluated by a qualified tire servicer immediately.

ARMSTRONGTIRE.COM



Zafco International LLC

Countyline Corporate Park
4220 W 104th Street, Suite 11
Hialeah, FL 33018

