2026 PRODUCT CATALOG

TRUCK & BUS RADIAL (TBR) TIRES
NORTH AMERICA



ARMSTRONG

A BRIEF RIDE THROUGH HISTORY

1912 — A tire dealer in New Jersey by the name of George F. Armstrong entered the tube and pneumatic tire industry in a tiny loft.

1922 — After a decade of promising growth, Armstrong purchases a small tire manufacturing plant in New Haven, Connecticut.

1961 — Armstrong became the fifth largest tire maker in the world and ranked amongst the Fortune 500 companies.

1965 — Armstrong introduced the first bias-belted fiberglass tire, one of many inventions.

1970 — The Armstrong Rubber Company moved into its $7 million headquarters designed by renowned architect Michael Brauer in New Haven, Connecticut.

1986 — Armstrong achieved a record sales volume worth $1 billion.

1988 — Armstrong was acquired by Pirelli S.p.A, becoming Pirelli Armstrong Tire Corporation.

1990 — Pirelli phased out the Armstrong brand in the latter half of the 1990s.

2012 — ZAFCO acquires the Armstrong brand from Pirelli with the goal of rebuilding it from the ground up.

2015 — Newly reengineered, the Armstrong brand returned to the tire industry, continuing the Armstrong legacy of making premium products by quality-minded people.

ABOUT US

Over the past 10 years, we've been steadily working to bring back one of the most reliable and trusted American tire brands – and modernizing it into a premium ZAFCO product offering.

Armstrong Tires is now part of the ZAFCO family of brands, and our dedication to quality, value, and safety turned out to be a perfect fit for the continuation of the Armstrong legacy.

Every Armstrong tire is backed by the uncompromising integrity and service that have been ZAFCO's signature for 30 years.

We're proud of the legacy that we've built over the last quarter century, and we look forward to growing the Armstrong brand with the help of key partners in the tire industry.



WHY ARMSTRONG?

VALUE-DRIVEN PRICING PROGRAM

Our unique pricing program is designed to provide the highest value at the lowest possible cost and grow your profit margins.





EPA SMARTWAY VERIFIED

Along with ongoing US EPA Smartway certification, Armstrong tires are engineered for low rolling resistance, delivering extra mileage and leading to fuel-efficiency and reduced CO2 emissions.

RECOGNIZABLE NAME WITH A RICH LEGACY

The Armstrong name was once a household name listed as a Fortune 500 company and the fifth largest tire manufacturer in the world.





SOPHISTICATED SAFETY MEASURES

Each tire is X-ray inspected and subjected to thorough testing for performance, durability and safety before leaving our factory floor.

CASING INTEGRITY

The remarkable casing integrity of Armstrong tires enables them to withstand more retreads over time, increasing lifespan and ultimately reducing waste in landfills.





A STELLAR SUITE OF SELL-OUT SUPPORT

Armstrong dealers receive sell-out support including training resources, marketing programs, and access to our Dealer Portal so you have all the sales tools you need at your fingertips.

THE BUILT TO LAST WARRANTY

TUFF 360

TIRES THAT ARE NOT ONLY BUILT TO LAST, BUT ACTUALLY GUARANTEED TO LAST.

Our industry-leading warranty includes free replacement of a tire that becomes unserviceable within the first 12 months and prorated replacement within 8 years from the original date of purchase, reimbursement for the cost of mounting and balancing up to $16.00 per tire, and a casing warranty through 3 retreads, and Road Hazard Coverage on eligible patterns.



FREE REPLACEMENT 12MO / 2/32NDS



8-YEAR WARRANTY PERIOD



CASING WARRANTY 'TIL 3 RETREADS



ROAD HAZARD COVERAGE*


CASING ALLOWANCE

1st RETREAD: $100	1st RETREAD: $60
2nd RETREAD: $75	2nd RETREAD: $30
3rd RETREAD: $35	3rd RETREAD: $15
11R22.5	215/75R17.5
11R24.5	235/75R17.5
12R22.5	245/70R17.5
12R24.5	225/70R19.5
295/75R22.5	245/70R19.5
295/80R22.5	265/70R19.5
285/75R24.5	285/70R19.5
315/80R22.5	245/75R22.5
385/65R22.5	265/75R22.5
425/65R22.5	255/70R22.5
445/65R22.5	275/70R22.5

For warranty coverage details, please visit armstrongtire.com/commercial/warranty


*Road Hazard coverage is available only on selective patterns. For full Road Hazard eligibility and coverage details, refer to the TUFF 360 Warranty Program in the warranty section of this catalog.

TIRE LINE-UP

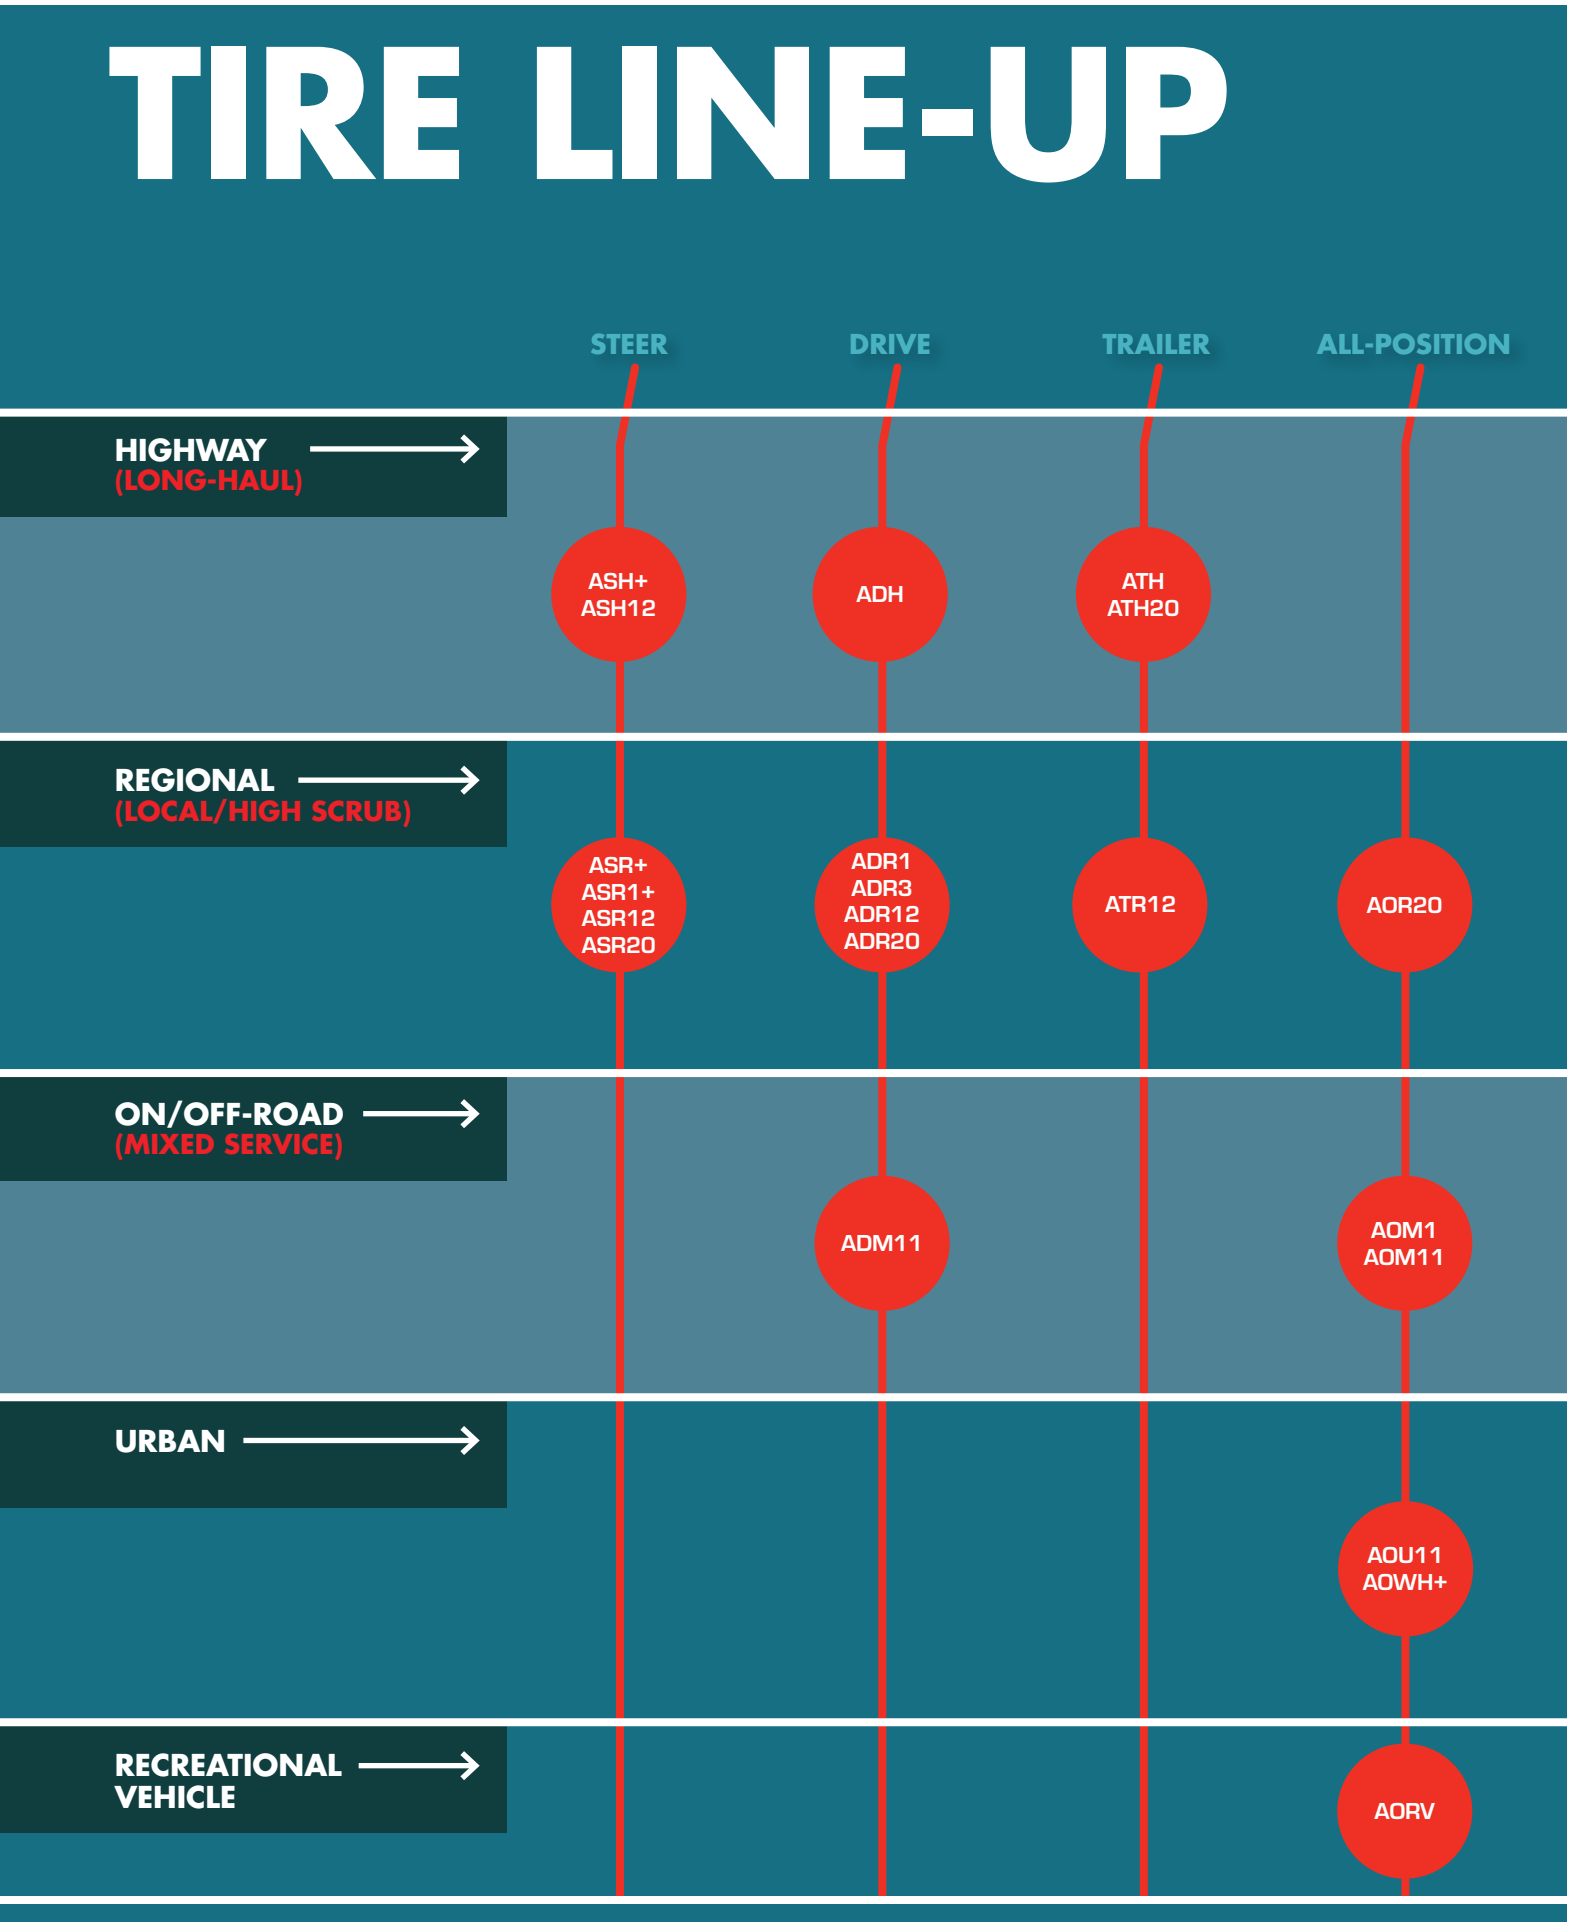
STEER
DRIVE
TRAILER
ALL-POSITION
HIGHWAY
(LONG-HAUL)
ASH+
ASH12
ADH
ATH
ATH20
REGIONAL
(LOCAL/HIGH SCRUB)
ASR+
ASR1+
ASR12
ASR20
ADR1
ADR3
ADR12
ADR20
ATR12
AOR20
ON/OFF-ROAD
(MIXED SERVICE)
ADM11
AOM1
AOM11
URBAN
AOU11
AOWH+
RECREATIONAL
VEHICLE
AORV

TIRE PATTERN NAME GUIDE

EXAMPLE →

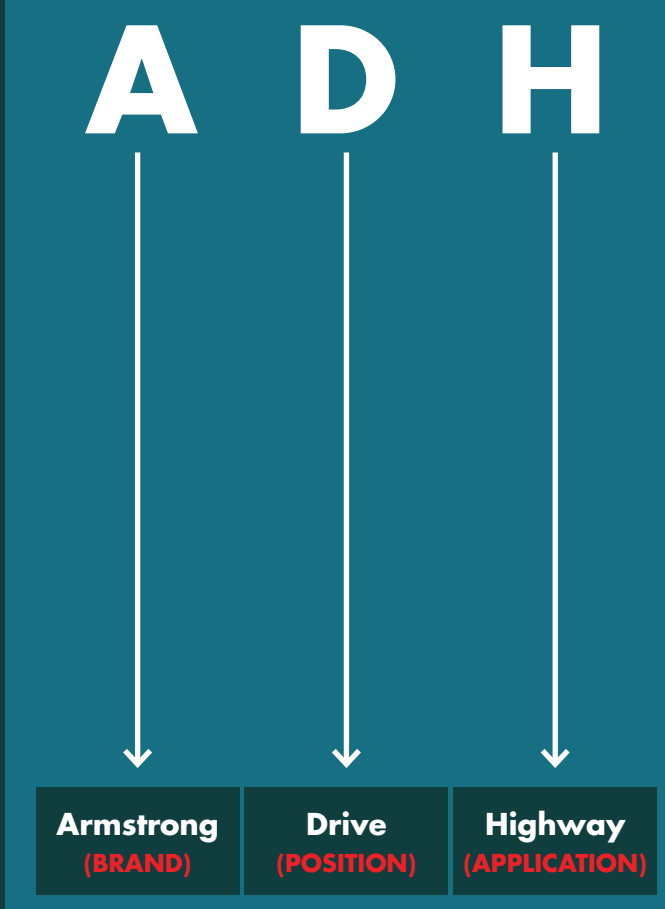

LETTER	DEFINITION	TYPE
A	Armstrong	Brand
D	Drive	Position
S	Steer	Position
T	Trailer	Position
O	Omni (All-Position)	Position
R	Regional	Application
H	Highway	Application
M	Mixed Service	Application
WH	Waste Hauler	Application
RV	Recreational Vehicle	Application

ASH+/

EPA SMARTWAY® VERIFIED












A premium steer axle tire for long-haul applications with unique tread design for excellent road grip and wet traction and siping ensures sharp steering and reduces noise. Decoupling grooves and wider shoulder ribs help minimize irregular wear.



EXCELLENT GRIP AND TRACTION.
Unique tread design offers excellent road grip and traction in wet conditions.




RESISTANCE TO IRREGULAR WEAR.
Decoupling grooves and wider shoulder ribs help minimize irregular wear.



NOISE REDUCTION.
Siping on the tread ensures sharp steering and reduction in noise.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200043970	11R22.5	146/143M	H/16	8.25	6615	6010	125	41.3	11.0	12.5	18	19.3	81	504
1200045790	295/75R22.5	148/145L	H/16	9.00	6945	6395	125	40.3	11.4	13.2	18	18.8	75	517
1200043974	11R24.5	149/146M	H/16	8.25	7165	6615	120	43.4	11.2	12.5	18	20.2	81	482
1200043971	285/75R24.5	144/141L	G/14	8.25	6175	5675	110	41.4	11.0	12.5	18	19.4	75	503

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	9-10	700 mm or 27.5 inches	230
295/75R22.5	3	9-10	850 mm or 33.4 inches	230
11R24.5	3	9-10	700 mm or 27.5 inches	230
285/75R24.5	3	9-10	850 mm or 33.4 inches	230



ASH+ /

EPA SMARTWAY® VERIFIED

STEER TIRE COST PER MILE LEADER



Size: 295/75R22.5 Long-Haul
USA Fleet Data

THE CLEAR WINNER IN VALUE

Tire Brand	Cost Per Mile (CPM)
ASH+	$0.00199
Tier-1 Leading Brand	$0.00363

YOUR SAVINGS 45% LOWER CPM!

Armstrong delivers Tier-1 mileage performance at a fraction of the operating cost, helping fleets reduce annual tire expenses significantly.

WHY ARMSTRONG ASH+ WINS

- Lower cost per mile than leading Tier-1 brands
- Strong casing + multiple retread cycles
- Engineered for long-haul durability
- High mileage return and consistent wear

SAVE MORE EVERY MILE

ADH /

EPA SMARTWAY® VERIFIED











A premium drive axle tire for long-haul applications offering a deeper tread for increased mileage, closed and solid shoulder ribs for resistance against uneven wear, and optimized block design to protect against stone retention.



INCREASED LIFESPAN.
Deeper tread increases the tire life considerably in high torque applications.




RESISTANCE AGAINST IRREGULAR WEAR.
Closed and solid shoulder ribs offer excellent resistance against irregular wear.



PREVENTS STONE RETENTION.
Optimized block design and stone ejectors prevent retention of stones.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200033731	11R22.5	148/145L	H/16	8.25	6945	6395	125	42.0	11.2	12.5	29	19.6	75	497
1200033733	295/75R22.5	144/141L	G/14	9.00	6175	5675	110	40.9	11.5	11.6	29	19.2	75	509
1200036856	11R24.5	149/146L	H/16	8.25	7165	6615	120	44.3	11.2	12.5	29	20.7	75	471
1200036099	285/75R24.5	144/141L	G/14	8.25	6175	5675	110	42.3	11.1	12.5	29	19.9	75	491

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	7-9	700 mm or 27.5 inches	235
295/75R22.5	3	7-9	850 mm or 33.4 inches	235
11R24.5	3	7-9	700 mm or 27.5 inches	235
285/75R24.5	3	7-9	850 mm or 33.4 inches	235



ADH /

DRIVE TIRE COST PER MILE LEADER

EPA SMARTWAY® VERIFIED



Size: 295/75R22.5 Long-Haul
USA Fleet Data

THE CLEAR WINNER IN VALUE

Tire Brand	Cost Per Mile (CPM)
ADH	$0.00146
Tier-1 Leading Brand	$0.00354

YOUR SAVINGS 59% LOWER CPM!

Armstrong delivers Tier-1 mileage performance at a fraction of the operating cost, helping fleets reduce annual tire expenses significantly.

WHY ARMSTRONG ADH WINS

- Lower cost per mile than leading Tier-1 brands
- Strong casing + multiple retread cycles
- Engineered for long-haul durability
- High mileage return and consistent wear

SAVE MORE EVERY MILE

ATH20 /

NEW












A trailer axle tire designed for long-haul applications with innovative design, characterized by its fuel-efficient tread pattern, optimized grooves, and advanced sipes not only enhances fuel efficiency and mileage but also ensures superior water evacuation, and extended tread life.




THE WIDE 5-RIB TREAD PATTERN.
Featuring a fuel-efficient tread design with an advanced tread compound, results in low rolling resistance and delivers outstanding mileage.



FOUR OPTIMIZED CIRCUMFERENTIAL STRAIGHT GROOVES.
With shallow tread depth and wavy groove walls, ensure excellent water evacuation and effective braking performance.



THE DISTRIBUTION OF ADVANCED SIPES DESIGN.
Combats aquaplaning and offers resistance to heat buildup and scrubbing.



SOLID SHOULDERS.
Equipped with decoupling grooves, generate uniform pressure at the shoulders, thereby reducing edge wear and extending tread life.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200068462	11R22.5	144/142L	G/14	8.25	6175	5840	105	41.1	11.0	12.5	13	19.2	75	506
1200068463	295/75R22.5	144/141L	G/14	9.00	6175	5675	110	39.6	11.5	13.4	13	18.5	75	524

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	9-11	635 mm or 25 inches	220
295/75R22.5	3	9-11	915 mm or 36 inches	225

ATH /

EPA SMARTWAY® VERIFIED









A premium trailer tire for long haul applications with uniquely designed shoulder grooves that provide resistance to uneven shoulder wear, shallow tread to reduce rolling resistance and heat buildup, and circumferential grooves for exceptional handling in wet conditions.



LOW ROLLING RESISTANCE.
Shallow tread significantly reduces rolling resistance and offers good resistance to heat buildup and scrubbing.




EVEN SHOULDER WEAR.
Uniquely designed shoulder grooves provide outstanding resistance to uneven shoulder wear.



EXCEPTIONAL WET HANDLING.
Four circumferential grooves evacuate water quickly and deliver exceptional handling.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200036053	11R22.5	148/145L	H/16	8.25	6945	6395	125	40.9	11.1	12.5	13	19.2	75	508
1200033754	295/75R22.5	144/141L	G/14	9.00	6175	5675	110	39.9	11.3	13.2	13	18.6	75	523
1200036859	11R24.5	149/146M	H/16	8.25	7165	6615	120	43.0	11.3	12.5	13	20.1	81	484
1200036054	285/75R24.5	144/141L	G/14	8.25	6175	5675	110	41.0	10.9	12.5	13	19.3	75	507

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	9-10	700 mm or 27.5 inches	220
295/75R22.5	3	9-10	850 mm or 33.4 inches	220
11R24.5	3	9-10	700 mm or 27.5 inches	220
285/75R24.5	3	9-10	850 mm or 33.4 inches	220



ASR20 /

NEW












A steer axle tire designed for regional applications with a unique tread pattern, effective stone ejection system, and innovative compounding, collectively enhance longevity, fuel efficiency, and maneuverability, making it a superior choice for drivers seeking performance and durability. This combination of attributes ensures optimal protection and reduced wear, ultimately delivering a reliable driving experience.




UNIQUE TREAD PATTERN.
With deeper tread depth enhances tire longevity.



STRAIGHT GROOVE EDGES.
Combined with a wavy groove wall design features a stone ejection system to ensure optimal casing protection.



WIDE SHOULDERS.
Equipped with sipes featuring chamfered edges to minimize uneven wear, thereby enhancing steering and maneuverability.



INNOVATIVE COMPOUNDING.
For improved fuel efficiency and tread resilience.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200068450	11R22.5	144/142L	G/14	8.25	6175	5840	105	41.7	11.0	12.5	22	19.4	75	498
1200068451	11R22.5	146/143L	H/16	8.25	6610	6005	120	41.7	11.0	12.5	22	19.4	75	498
1200068454	255/70R22.5	140/137L	H/16	7.50	5510	5070	120	36.9	9.9	11.3	18	17.2	75	564
1200068455	275/70R22.5	148/145L	J/18	8.25	6940	6395	130	37.9	10.6	12.4	18	17.6	75	548
1200068457	295/75R22.5	144/141L	G/14	9.00	6175	5675	110	40.2	11.5	13.4	22	18.7	75	517
1200068458	295/75R22.5	149/146L	H/16	9.00	7160	6610	123	40.2	11.5	13.2	22	18.7	75	517
1200068452	11R24.5	146/143L	G/14	8.25	6610	6005	105	43.7	11.0	12.5	22	20.4	75	475
1200068453	11R24.5	149/146L	H/16	8.25	7160	6610	120	43.7	11.0	12.5	22	20.4	75	475
1200068456	285/75R24.5	147/144L	H/16	8.25	6780	6175	120	41.5	11.0	12.5	22	19.4	75	501



ASR20 /

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	10-13	635 mm or 25 inches	226
255/70R22.5	3	10-13	762 mm or 30 inches	209
275/70R22.5	3	10-13	787 mm or 31 inches	230
295/75R22.5	3	10-13	915 mm or 36 inches	235
11R24.5	3	10-13	635 mm or 25 inches	226
285/75R24.5	3	10-13	712 mm or 28 inches	230

ASR+ /

EPA SMARTWAY® VERIFIED












A steer axle tire designed exclusively for pickup and delivery applications with solid shoulders to help even wear while providing precise steering and maneuvering ability, optimized siping on inner ribs to improve handling and traction, and groove bottom protectors to prevent stone drilling and retention.



PREVENTS STONE RETENTION.
Groove bottom protectors prevent stone drilling and retention.



EVEN SHOULDER WEAR.
Solid shoulders help even wear while delivering precise steering and maneuvering ability.



EXCELLENT TRACTION.
Optimized siping on inner ribs improves handling and yields excellent traction.


PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200044472	225/70R19.5*	128/126L	G/14	6.00	3970	3750	110	32.0	8.6	10.0	16	15.0	75	651
1200044473	245/70R19.5*	136/134L	H/16	6.75	4940	4675	120	33.1	9.7	11.0	16	15.4	75	631
1200044474	265/70R19.5*	140/138L	G/14	7.50	5510	5205	110	34.1	10.3	11.6	17	15.8	75	614
1200044468	11R22.5	146/143M	H/16	8.25	6615	6010	120	41.5	11.0	12.5	19	19.3	81	504
1200044466	255/70R22.5	140/137L	H/16	7.50	5510	5070	120	36.8	10.0	11.3	15	17.1	75	568
1200046277	275/70R22.5	148/145L	J/18	8.25	6945	6395	130	37.9	11.0	12.0	19	17.6	75	552
1200045789	295/75R22.5	149/146L	H/16	9.00	7165	6615	110	40.4	11.3	13.2	20	18.8	75	517
1200044471	11R24.5	149/146M	H/16	8.25	7165	6615	120	43.5	11.3	12.5	20	20.3	81	480
1200044469	285/75R24.5	144/141L	G/14	8.25	6175	5675	110	41.6	11.1	12.5	20	19.5	75	501

*SUITABLE FOR RV

ASR+ /

EPA SMARTWAY® VERIFIED

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
225/70R19.5	3	9-10	750 mm or 29.5 inches	180
245/70R19.5	3	9-10	750 mm or 29.5 inches	215
265/70R19.5	3	9-10	800 mm or 31.5 inches	220
11R22.5	3	9-10	700 mm or 27.5 inches	230
255/70R22.5	3	9-10	800 mm or 31.5 inches	210
275/70R22.5	3	9-10	850 mm or 33.4 inches	220
295/75R22.5	3	9-10	850 mm or 33.4 inches	230
11R24.5	3	9-10	700 mm or 27.5 inches	230
285/75R24.5	3	9-10	850 mm or 33.4 inches	230



ADR3/

EPA SMARTWAY® VERIFIED

NEW












A drive axle tire for regional applications. The enhanced block-type tread design features an optimized footprint, which contributes to improved traction, increased mileage, and a reduction in irregular wear. The incorporation of 3D sipes and open shoulder lugs ensures excellent traction and facilitates quicker water evacuation across various road conditions. Additionally, the reinforced casing enhances the tire's durability and retreadability.



ENHANCED BLOCK TYPE TREAD DESIGN WITH OPTIMIZED FOOTPRINT.
Provides better traction, increased mileage and reduced irregular wear.



3D SIPES AND OPEN SHOULDER LUGS.
Offer excellent traction and quicker water evacuation on all road conditions.




REINFORCED CASING.
For enhanced durability and retreadability.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200065274	11R22.5	146/143L	H/16	8.25	6610	6005	120	42.0	11.1	12.4	26	19.6	75	491
1200065273	255/70R22.5	140/137L	H/16	7.50	5510	5070	120	37.4	10.0	11.6	26	17.5	75	559
1200065276	295/75R22.5	144/141L	G/14	9.00	6175	5675	110	40.9	11.4	13.2	26	19.1	75	509
1200065275	11R24.5	149/146L	H/16	8.25	7160	6610	120	44.1	11.3	12.4	26	20.6	75	468
1200065277	285/75R24.5	144/141L	G/14	8.25	6175	5675	110	42.0	11.2	12.9	26	19.7	75	491

ADR3/

EPA SMARTWAY® VERIFIED

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	5-8	700 mm or 27.5 inches	224
255/70R22.5	3	5-8	800 mm or 31.5 inches	216
295/75R22.5	3	5-8	850 mm or 33.4 inches	225
11R24.5	3	5-8	700 mm or 27.5 inches	227
285/75R24.5	3	5-8	850 mm or 33.4 inches	230



ASR1+












A steer axle tire exclusively designed with all-position capability for regional applications with square shoulders to combat irregular wear, enhance cornering, and deliver long mileage, remarkable road grip in both dry and wet conditions, and a special tread compound that provides extraordinary resistance against abrasion.



EXCELLENT ROAD GRIP.
Siping on the tread offers remarkable road grip in both dry and wet conditions.



ENHANCED CORNERING AND LONG MILEAGE.
Square shoulders combat irregular wear, enhancing cornering and delivering long mileage.




EXTRAORDINARY RESISTANCE.
A special tread compound offers extraordinary resistance against abrasion.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200044625	12R22.5*	152/148M	H/16	9.00	7825	6945	125	42.9	11.9	13.5	20	20.1	81	485
1200044626	295/80R22.5*	152/148M	H/16	9.00	7825	6945	125	41.3	11.6	13.2	20	19.4	81	504
1200044627	315/80R22.5*	156/150L	L/20	9.00	8820	7385	125	42.7	12.2	13.8	20	19.8	75	490

*SUITABLE FOR RV

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
12R22.5	3	7-9	700 mm or 27.5 inches	230
295/80R22.5	3	7-9	700 mm or 27.5 inches	240
315/80R22.5	3	7-9	800 mm or 31.5 inches	260



ADR1 /










A drive axle tire for regional applications with an open shoulder design that provides quicker water evacuation and superior road grip, deeper grooves for better traction and prolonged tire life, and optimized block shape and unique tread design to prevent irregular wear and stone retention.



QUICK WATER EVACUATION.
An open shoulder design provides quicker water evacuation which results in superior road grip.




RESISTANCE AGAINST IRREGULAR WEAR.
Optimized block shape and unique tread design prevent irregular wear and stone retention.



PROLONGED LIFESPAN.
Deeper grooves ensure better traction and prolonged tire life.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200040682	225/70R19.5	128/126L	G/14	6.00	3970	3750	110	32.3	8.9	10.0	19	15.0	75	647
1200040684	245/70R19.5	136/134L	H/16	6.75	4940	4675	120	33.3	9.7	11.0	19	14.1	75	656
1200035701	12R22.5	152/148M	H/16	9.00	7825	6945	125	43.3	11.9	13.5	28	20.7	81	477
1200035703	295/80R22.5	152/148M	H/16	9.00	7825	6945	125	42.0	11.6	13.2	28	19.7	81	495
1200035765	315/80R22.5	156/150L	L/20	9.00	8820	7385	125	43.1	12.2	13.8	28	19.9	75	486

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
225/70R19.5	3	7-9	750 mm or 29.5 inches	180
245/70R19.5	3	7-9	750 mm or 29.5 inches	220
12R22.5	3	7-9	700 mm or 27.5 inches	240
295/80R22.5	3	7-9	700 mm or 27.5 inches	250
315/80R22.5	3	7-9	800 mm or 31.5 inches	250




AOR20/

NEW












An all-position tire designed for regional applications with an optimized tread design and robust casing construction significantly enhance mileage performance, traction, and durability, making it an ideal choice for regional applications. This combination not only improves rolling resistance but also minimizes uneven wear, ensuring a reliable and efficient driving experience.



OPTIMIZED TREAD WIDTH.
Enhances pattern volume, leading to improved mileage performance and decreased rolling resistance.



THE WIDE SQUARE SHOULDERS.
Featuring small sipes along the groove inner edges, enhance traction performance and help prevent uneven wear.



A MIX OF WAVY AND STRAIGHT GROOVES.
Delivers exceptional traction and drainage capabilities for regional applications.



THE PREMIUM, STURDY CASING CONSTRUCTION.
Offers greater resistance to damage.


PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200068464	215/75R17.5	135/133L	H/16	6.00	4805	4540	123	30.4	8.2	9.7	16	14.3	75	683
1200068461	235/75R17.5	143/141L	J/18	6.75	6005	5675	130	31.3	8.9	10.6	16	14.7	75	664
1200068459	225/70R19.5	128/126N	G/14	6.75	3970	3750	110	32.0	8.8	10.0	16	14.9	87	648
1200068460	225/70R19.5	130/128N	H/16	6.75	4190	3970	120	32.0	8.8	10.0	16	14.9	87	648
1200068465	245/70R19.5	133/131M	G/14	7.50	4540	4300	110	33.1	9.7	11.0	16	15.4	81	627
1200068466	245/70R19.5	136/134M	H/16	7.50	4940	4675	123	33.1	9.7	11.0	16	15.4	81	627

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
215/75R17.5	3	10-13	686 mm or 27 inches	186
235/75R17.5	3	10-13	660 mm or 26 inches	196
225/70R19.5	3	10-13	712 mm or 28 inches	195
245/70R19.5	3	10-13	712 mm or 28 inches	206

ASR12 /











A steer pattern designed for regional applications with a wide tread pattern for exceptional grip across all road conditions, a low hysteresis compound that leads to low rolling resistance, solid shoulder ribs for increased handling, and innovative outer grooves for enhanced casing life.




WIDE TREAD PATTERN.

A wide tread pattern with sipes in three center ribs provides exceptional grip across all road conditions.




LOW HYSTERESIS COMPOUND.

Low hysteresis compound leads to low rolling resistance and better fuel efficiency, while delivering extraordinary mileage.



SOLID SHOULDER RIBS.

With four grooves provide excellent handling and driving stability.




INNOVATIVE OUTER GROOVES.

Innovative outer grooves with a variable groove angle design and stone ejectors reduce stone retention and drilling for enhanced casing life.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200061347	215/75R17.5	128/126M	G/14	6.00	3970	3740	110	30.1	8.4	9.4	15	14.0	81	694
1200061348	235/75R17.5	132/130M	G/14	6.75	4410	4190	112	31.3	9.3	10.3	15	14.5	81	668
1200052736	245/70R19.5*	136/134M	H/16	7.50	4940	4675	120	31.0	9.8	11.0	15	14.4	81	675
1200052737	265/70R19.5*	140/138M	G/14	7.50	5510	5205	110	34.3	10.3	11.6	17	15.8	81	613
1200063795	285/70R19.5*	146/144M	H/16	7.50	6610	6175	130	35.3	11	12.5	17	16.3	81	594

*SUITABLE FOR RV

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
215/75R17.5	3	8-9	550 mm or 21.6 inches	200
235/75R17.5	3	8-9	650 mm or 25.6 inches	220
245/70R19.5	3	8-9	710 mm or 27.8 inches	220
265/70R19.5	3	8-9	700 mm or 27.6 inches	235
285/70R19.5	3	8-9	850 mm or 33.4 inches	245




ADR20 /

NEW






A drive axle tire designed for regional applications with innovative design and advanced compound which significantly enhances mileage, stability, and traction, ensuring optimal performance on dry, wet and snow surfaces. This combination of features not only minimizes wear but also promotes uniform handling, making it a superior choice for drivers seeking durability and reliability.




OPTIMIZED DEEP TREAD DESIGN.

Features advanced abilities that minimizes wear by decreasing the ground contact area, resulting in significantly enhanced mileage performance.




3D SIPES.

The 3D sipes enhance tread stability and provide better traction.



NARROWED GROOVE WIDTHS.

The narrowed groove widths, combined with tie-bars between the pattern blocks, boost the stability of the tread blocks, leading to uniform wear and improved handling performance.



ADVANCED COMPOUND.

The advanced compound is specifically formulated to enhance mileage and guarantee performance on regional roads.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200068467	225/70R19.5	128/126N	G/14	6.75	3970	3750	110	32.2	8.7	10.0	19	15.0	87	646
1200068468	225/70R19.5	130/128N	H/16	6.75	4190	3970	120	32.2	8.7	10.0	19	15.0	87	646

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
225/70R19.5	3	8-10	686 mm or 27 inches	195

ADR12 /











A drive pattern for regional applications with a 4-channel pattern with zigzag grooves and a combination of rib-and-block structure provides longer tread life structure to resist irregular wear, wide-open shoulder tread design for enhanced stability and unique sipes on all tread blocks for enhanced wet and snow grip performance.



4-CHANNEL PATTERN WITH ZIGZAG GROOVES.

For longer tread life with excellent traction on all road conditions.



A COMBINATION OF "RIB AND BLOCK" PATTERN STRUCTURE.

Resists irregular wear (Heel and Toe wear).



WIDE OPEN SHOULDER TREAD DESIGN.

For enhanced stability, longer mileage and better handling performance.




UNIQUE SIPES ON ALL TREAD BLOCKS.

Enhance wet grip and snow grip performance.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200061359	215/75R17.5	126/124M	F/12	6.00	3750	3525	100	30.4	8.3	9.4	17	14.1	81	688
1200061360	235/75R17.5	132/130M	G/14	6.75	4410	4190	112	30.1	9.3	10.3	16	14.5	81	682
1200056267	265/70R19.5	140/138M	G/14	7.50	5510	5205	110	34.1	10.4	11.6	19	14.9	81	631
1200063796	285/70R19.5	146/144M	L/20	7.50	6610	6175	130	35.2	11.0	12.5	19	12.5	81	593

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
215/75R17.5	3	8-9	550 mm or 21.6 inches	200
235/75R17.5	3	8-9	650 mm or 25.6 inches	220
265/70R19.5	3	8-9	700 mm or 27.6 inches	235
285/70R19.5	3	8-9	850 mm or 33.4 inches	245



ATR12 /












A trailer tire for regional applications designed with a wide tread to reduce irregular wear, a tread compound to offer better fuel efficiency, solid shoulder ribs that improve wet braking, and innovative circumferential grooves for quicker water evacuation.



WIDE TREAD WITH INCREASED TREAD CONTACT AREA.
Helps reduce irregular wear.




SOLID SHOULDER RIBS.
Enable efficient braking on dry and wet surfaces.



INNOVATIVE CIRCUMFERENTIAL GROOVE.
Design offers quicker water evacuation while improving trailer stability.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200052738	215/75R17.5	135/133J	H/16	6.00	4805	4540	125	30.2	8.3	9.4	15	14.0	62	694
1200052739	235/75R17.5	143/141J	J/18	6.75	6010	5675	125	31.3	9.1	10.3	15	14.3	62	673
1200061351	245/70R17.5	143/141J	J/18	7.50	6010	5675	130	30.9	9.8	11.0	15	14.3	62	679
1200056268	265/70R19.5	143/141J	J/18	7.50	6010	5675	125	34.0	10.3	11.6	15	15.9	62	613
1200061350	285/70R19.5	150/148J	J/18	8.25	7390	6940	130	35.1	11.0	12.5	15	16.2	62	597

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
215/75R17.5	3	5-6	550 mm or 21.6 inches	180
235/75R17.5	3	5-6	650 mm or 25.6 inches	205
245/70R17.5	3	5-6	710 mm or 27.9 inches	220
265/70R19.5	3	5-6	800 mm or 31.5 inches	220
285/70R19.5	3	7-9	850 mm or 30.4 inches	235



ASH12 /












A steer pattern designed for long–haul and regional applications features strong shoulder ribs and a five-rib tread for exceptional steering, zigzag grooves for quicker water evacuation, specially designed sipes to resist irregular wear, and an innovative tread compound that increases mileage while reducing fuel consumption.



STRONG SHOULDER RIBS.
And a five-rib tread pattern designed for exceptional steering, while a pyramid-base rib design offers reduced rolling resistance that evolves with wear.




FOUR WIDE ZIGZAG GROOVES.
Specially designed to ensure quicker water evacuation and avoid stone trapping and casing damage.



SPECIALLY DESIGNED SIPES.
Reduce braking distance and increase resistance against irregular wear.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200052732	385/65R22.5	160K	L/20	11.75	9921	-	130	42.2	15.2	-	20	19.6	68	498
1200052733	385/65R22.5	164K	N/24	11.75	11025	-	130	42.2	15.2	-	20	19.4	68	498

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
385/65R22.5	3	9-10	1000 mm or 39.3 inches	315



AOM11/

NEW









An all-position tire for on/off-road applications featuring a wide tread block design with an optimized tie bar that ensures even wear and excellent traction for both on and off-road conditions. Additionally, the extra wide groove design helps to avoid stone trapping, further enhancing traction. Furthermore, the special tread compound is engineered to resist cuts and chips while providing higher mileage.




WIDE TREAD BLOCK DESIGN.

With optimized tie bar to ensure even wear and excellent traction for on/off-road condition.



EXTRA WIDE GROOVE DESIGN.

To avoid stone trapping and provide excellent traction.




SPECIAL CUT/CHIP TREAD COMPOUND.

To resist off-road abuse and provide higher mileage.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200063809	385/65R22.5	160K	L/20	11.75	9920	-	130	42.3	15.1	-	23	19.6	68	495
1200064392	385/65R22.5	164K	N/24	11.75	11000	-	130	42.3	15.1	-	23	19.6	68	495
1200063807	425/65R22.5	165K	L/20	12.25	11400	-	120	44.5	16.7	-	23	20.5	68	472
1200063808	445/65R22.5	169K	L/20	13.00	12800	-	130	45.4	17.4	-	21	20.9	68	462

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
385/65R22.5	3	9-11	1000 mm or 39.4 inches	315
385/65R22.5	3	9-11	1000 mm or 39.4 inches	315
425/65R22.5	3	9-11	1300 mm or 51.2 inches	340
445/65R22.5	3	9-11	1100 mm or 43.3 inches	355



AOM1 /







An all-position radial for high scrub applications with a special zigzag tread design that offers extraordinary resistance to cuts, chips, tearing, and irregular wear. A deeper tread design delivers exceptional traction and longer mileage, while wider circumferential grooves quickly evacuate mud and silt.



RESISTANCE AGAINST IRREGULAR WEAR.

A special zigzag tread design offers extraordinary resistance to cuts, chips, tearing, and irregular wear, making it ideal for high scrub urban applications.



INCREASED LONGEVITY AND LONGER MILEAGE.

A deeper tread design delivers exceptional traction and longer mileage, while wider circumferential grooves quickly evacuate mud and silt.





ENHANCED TRACTION.

Lugs on shoulders withstand impacts and enhance traction performance in both wet and dry conditions.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200042176	11R22.5	148/145K	H/16	8.25	6945	6395	125	41.5	11.0	12.5	20	19.3	68	503
1200040950	315/80R22.5	160/157J	L/20	9.00	9920	9095	130	42.7	12.0	13.8	20	19.5	62	493
1200042630	11R24.5	149/146K	H/16	8.25	7165	6615	125	43.9	11.3	12.5	24	20.5	68	475
1200045735	12R24.5	152/149K	H/16	9.00	7825	7165	120	45.1	12.0	13.5	23	20.9	68	464

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
11R22.5	3	9-10	700 mm or 27.5 inches	220
315/80R22.5	3	9-10	800 mm or 31.5 inches	260
11R24.5	3	9-10	700 mm or 27.5 inches	220
12R24.5	3	9-10	1000 mm or 39.3 inches	250





ADM11/












A drive tire designed for mixed applications featuring a wide and deep tread for increased mileage, an open shoulder design to enable water and mud evacuation, variable-width grooves for enhanced retreadability, and an improved block profile to reduce wear and tear.



WIDE AND DEEP TREAD.
Delivers longer mileage and exceptional stability.




OPEN SHOULDER DESIGN.
Enables quicker water and mud evacuation.



VARIABLE-WIDTH GROOVES.
Leads to lower stone retention and protects the casing for enhanced retreadability.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200052731	315/80R22.5	156/150K	J/18	9.00	8820	7385	125	43.0	12.4	13.8	27	19.9	68	487

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
315/80R22.5	3	7-9	900 mm or 35.4 inches	260



AOWH+/










An all-position tire designed exclusively for waste-haul trucks with 10,000 pounds of single-load carrying capacity. Zigzag grooves and shoulder lugs offer better steering control in urban applications while increasing traction and the release of heat. Stone ejectors in all grooves protect the belts and improve retreadability.




FOUR–RIB PATTERN.

A four-rib pattern maximizes tread volume rubber for longer mileage.



OPTIMIZED TREAD COMPOUND.

An optimized tread compound offers cut and chip resistance, lower heat build-up, and longer mileage.




STONE EJECTORS.

Stone ejectors in all grooves prevent damage from stones and road hazards, enhancing tire life.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200054851	315/80R22.5	161/157K	L/20	9.00	10195	9095	130	42.9	12.5	13.8	23	19.7	68	490


Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
315/80R22.5	3	7-9	800 mm or 31.5 inches	260



AOU11/










An all–position tire that is exclusively designed for urban applications with an extra thick sidewall to protect against shocks, a five-rib pattern with excellent handling, sidewall wear indicators to signal rotation, and special grooves to avoid casing damage.




HIGH PERFORMING URBAN DESIGN.

Urban pattern with extra thick sidewall offers protection against shocks, impacts and kerb scrubbing.




A FIVE-RIB PATTERN.

A five-rib wide tread and sipes ensure excellent handling and grip on both dry and wet road conditions.



SIDEWALL WEAR INDICATORS.

Sidewall wear indicators signal when it's time for tire rotation to avoid damage to the body ply for safety and retreadability.




SPECIAL GROOVES.

Special grooves designed to avoid stone trapping and casing damage.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200069133	275/70R22.5	152/149J	J/18	8.25	7830	7160	130	38	11.1	12.2	21	17.6	62	550

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
275/70R22.5	3	8 - 9	1130 mm or 44.4 inches	248



AORV /











An all-position tire designed for superior performance on recreational vehicles and motor homes with a five-rib pattern to ensure good steering performance, a special tread compound for better rolling resistance, shoulder rib sipes to avoid uneven wear from the Poisson effect, and center groove stone ejectors.




A FIVE–RIB PATTERN.

A five-rib pattern ensures good steering performance and safety.



A SPECIAL TREAD COMPOUND.

A special tread compound offers better rolling resistance and tire longevity.




STONE EJECTORS IN CENTER GROOVES.

Stone ejectors in center grooves prevent damage from stones and road hazards, enhancing tire life.

PRODUCT CODE	TIRE SIZE	SERVICE DESCRIPTION	LOAD RANGE / PLY RATING	RIM WIDTH	MAX. LOAD (SINGLE)	MAX. LOAD (DUAL)	INFLATION PRESSURE	OVERALL DIAMETER	SECTION WIDTH	MINIMUM DUAL SPACING	TREAD DEPTH	STATIC LOADED RADIUS	MAX SPEED	REVS PER MILE
				inches	lbs	lbs	psi	inches	inches	inches	32nds	inches	mph	
1200044476	245/75R22.5	134/131L	G/14	7.50	4675	4300	110	37.1	9.8	11.0	19	17.5	75	560
1200044477	265/75R22.5	138/135L	G/14	7.50	5205	4805	110	38.3	10.5	11.6	19	18.0	75	543

Casing Size	Regrooving Guidelines		Retreading Recommendations	
	Depth (32nds)	Width (32nds)	Buffing radius	Tread width (mm)
245/75R22.5	3	5-6	750 mm or 29.5 inches	215
265/75R22.5	3	5-6	800 mm or 31.5 inches	220



TUFF 360 WARRANTY PROGRAM

WHO IS ELIGIBLE FOR THIS LIMITED WARRANTY COVERAGE? ELIGIBILITY CONDITIONS

To be covered by the terms of this Limited Warranty, you must meet all of the following conditions:

1. You are the original purchaser, or the original purchaser's authorized agent, of new Armstrong truck tires that feature a valid and legible DOT (Department of Transportation) tire identification number.
2. The tire size, load index, and speed rating are equivalent to or greater than the specifications provided by Armstrong.
3. The tire was used only on the vehicle on which it was originally installed and was not transferred, resold, or removed for use on another vehicle.
4. The tire was purchased on or after January 1, 2015, and you can provide original proof of purchase (such as receipt or invoice) showing the date of purchase, tire size, and dealer name.

This Limited Warranty applies only to eligible tires purchased and used in the United States (meaning the 48 contiguous states, the District of Columbia, Hawaii, and Alaska), and Canada.

This Limited Warranty applies only to the original purchaser or the original purchaser's authorized agent. The original purchaser and any authorized agent may not assign or transfer their rights under this Limited Warranty to any other person or entity, except to the extent such restriction is prohibited by applicable law.

WHAT IS COVERED UNDER THE LIMITED WARRANTY AND FOR HOW LONG?

A. FREE TIRE REPLACEMENT:

Subject to the terms and conditions of this Limited Warranty, any eligible tire that becomes unserviceable due to a covered defect in materials or workmanship will be replaced free of charge with a comparable Armstrong tire. This free replacement coverage applies during the first 2/32" of treadwear, or within twelve (12) months from the date of purchase (original proof of purchase is required), whichever comes first, and only for tires supplied directly from Armstrong or through an authorized Armstrong dealer.

Armstrong will reimburse the documented cost of mounting and balancing for up to a maximum of $16.00 per tire. You are responsible for any additional costs, taxes, or fees. The defective Armstrong tire must be presented to and replaced by Armstrong or an authorized Armstrong dealer, and Armstrong reserves the right to retain the defective tire for inspection.

B. PRO-RATED TIRE REPLACEMENT:

After the free replacement period expires, this pro-rated tire replacement credit coverage applies to any eligible tire that becomes unserviceable solely due to defects in materials or workmanship. This pro-rated tire replacement credit coverage remains available for eight (8) years from the original date of purchase (original proof of purchase is required) and applies only to tires supplied directly from Armstrong or an authorized Armstrong dealer.

The following conditions apply to all pro-rated tire replacement credit claims:

1. Only damage that is solely due to defects in materials or workmanship, as determined by Armstrong in its sole discretion, will be accepted.
2. Upon inspection, Armstrong or its authorized representatives, will have the sole and final discretion to determine whether a tire qualifies for this coverage. The final decision on eligibility will be made by Armstrong representatives or authorized personnel.
3. Any replacement credit will be calculated on a prorated basis, as determined by Armstrong. You are responsible for all mounting, balancing, or any other service charges, taxes, disposal fees, and all government fees.

HOW WILL REPLACEMENT VALUE BE CALCULATED?

The replacement value will be calculated based on the amount of remaining tread depth on the eligible tire at the time of inspection, using the following formula:

$$\text{Adjustment Percentage} = \frac{\text{(Remaining Tread Depth)}}{\text{(Original Tread Depth)}} \times 100$$

The resulting adjustment percentage will be applied to the applicable replacement tire price, as determined by Armstrong, to calculate the amount of any replacement credit.

C. ROAD HAZARD COVERAGE:

COVERAGE DETAILS

The Armstrong Road Hazard Warranty protects eligible Armstrong TBR tires against unforeseen damage caused by road hazards encountered during normal driving conditions. If a tire sustains covered damage, it may qualify for a pro-rata refund based on the original purchase price, as determined by Armstrong in its sole discretion.

THIS LIMITED ROAD HAZARD WARRANTY ONLY COVERS DAMAGE CAUSED BY

- Cuts, unrepairable punctures, snags, and bruises.
- Impact from potholes, curbs, or road debris.

ELIGIBILITY CRITERIA

- This limited road hazard warranty applies only to the following tire patterns: ASH+, ADH, ATH, ATH20, ASR+, ASR20 and ADR3.

- This limited road hazard warranty coverage is valid for three years from the date of purchase (original proof of purchase is required) or until 50% tread wear, whichever occurs first, for tires supplied directly from Armstrong or an authorized Armstrong dealer.
- Effective May 2026, this limited road hazard warranty coverage is limited to tires with a 2026 DOT date code ONLY.

WHAT IS NOT COVERED UNDER THIS LIMITED WARRANTY?

1. Tire damage or failure due to:
   a. Improper use or operation. This includes overinflation, underinflation, overloading, contamination by petroleum products or other chemicals, tire chain damage, racing, excessive off-road use, commercial misuse, or willful abuse.
   b. Improper or insufficient maintenance or repairs. This includes misalignment, wheel imbalance, defective brakes or shock absorbers, improper mounting or dismounting, failure to rotate or maintain tires, or other vehicle conditions.
   c. Retreading, repairs, or alterations by third parties.
   d. Road hazards, except as set forth above in this Limited Warranty.
2. Tires that are:
   a. Used beyond the original tread life (where wear indicators are exposed).
   b. Sold as "Defective Appearance" (DA) tires.
   c. Branded as "Blemished" or "Non-Adjustable."
   d. Installed on any vehicle other than the original vehicle.
   e. Purchased as used tires.
3. Ride [Tire] disturbances that occur after the first 2/32" of treadwear.
4. Ozone or weather cracking on tires purchased more than four (4) years prior to the date of the claim. Original proof of purchase is required. Without original proof of purchase, the date of manufacture will determine eligibility.
5. Any tire alteration. This includes retreading, repairs, siping, buffing, stud pin holes, re-grooving, or additives.
6. Any other damage caused by actions, omissions, or conditions that do not follow or comply with Armstrong's specifications or the vehicle manufacturer's specifications, including use in applications not recommended by Armstrong.
7. Normal wear and tear or irregular wear from suspension/alignment.
8. Accidents.
9. Theft or vandalism.

ARMSTRONG CASING ALLOWANCE

If an Armstrong TBR tire becomes unserviceable for a reason within the manufacturer's control, determined by Armstrong in its sole discretion, and the casing cannot be retreaded, Armstrong may offer a casing allowance. This casing allowance applies within eight (8) years from the date of manufacture or through three (3) retreads of service, whichever comes first.

Casing Size Table:

1st RETREAD: $100 2nd RETREAD: $75 3rd RETREAD: $35	1st RETREAD: $60 2nd RETREAD: $30 3rd RETREAD: $15
11R22.5	215/75R17.5
11R24.5	235/75R17.5
12R22.5	245/70R17.5
12R24.5	225/70R19.5
295/75R22.5	245/70R19.5
295/80R22.5	265/70R19.5
285/75R24.5	285/70R19.5
315/80R22.5	245/75R22.5
385/65R22.5	265/75R22.5
425/65R22.5	255/70R22.5
445/65R22.5	275/70R22.5

Note: This allowance does not include the costs of retreading services, materials, or other related expenses.

EXCLUSIONS FOR CASING WARRANTY:

1. Casings that cannot be retreaded due to excessive tread wear.
2. Failures resulting from incorrect retread material or processing.

HOW TO FILE A WARRANTY CLAIM

To submit a warranty claim, you must first complete an Armstrong "Claim Adjustment Form". You can request this form by emailing **claims@zafco.com** with the subject line "Claim Adjustment Form Request."

Each claim must include at least four (4) clear, medium-resolution pictures per tire showing:

1. Serial and DOT number, (labeled as 1-1).
2. The specific condition being claimed (labeled as 1-2).
3. The complete tire with the tread portion clearly visible, (labeled 1-3) and so forth.
4. The inner side of the tire, clearly showing the damaged area (labeled as 1-4).

Armstrong and its representatives reserve the right to inspect the tire before providing any replacement, credit, or refund. You must retain the defective tire and make it available for inspection by Armstrong or its authorized representatives upon request. Failure to retain or produce the tire may result in denial of the claim.

You must email the completed form and pictures to **claims@zafco.com**. All claims must be submitted within [60] days of discovering the tire condition. Armstrong will use commercially reasonable efforts to review claims within [45]days after receiving all required details and documentation, but this target timeframe is not a guarantee of claim approval or payment. Failure to submit a complete claim within the required timeframe may result in denial of the claim.

LEGAL RIGHTS AND DISCLAIMERS

LEGAL RIGHTS

This Limited Warranty gives you specific legal rights. You may also have other rights under applicable federal law and the laws of the state where the tire was purchased or used, and those rights vary from state to state. This warranty is intended to be a limited warranty and not a full warranty to the maximum extent permitted by applicable law.

WARRANTY LIMITATIONS

To the fullest extent permitted by applicable law, this Limited Warranty constitutes the sole and exclusive express warranty for the tire, and the remedies provided under this Limited Warranty constitute the sole and exclusive remedies available for any defect, nonconformity, condition, or other claim relating to the tire. This Limited Warranty is provided in lieu of all other warranties, remedies, representations, and conditions, whether oral, written, statutory, or otherwise, including any warranty arising from course of dealing, course of performance, usage of trade, advertising, statements, samples, specifications, or descriptions.

For tires purchased for commercial, business, fleet, resale, or other non-household use, all implied warranties, including any implied warranty of merchantability, implied warranty of fitness for a particular purpose, and warranty against hidden or latent defects, are disclaimed to the maximum extent permitted by applicable law, and this Limited Warranty is the sole and exclusive warranty. If applicable law does not allow an implied warranty to be disclaimed, including in certain consumer transactions, the duration and scope of any implied warranty are limited to the shortest period and narrowest scope permitted by law, and in no event will any implied warranty last longer than the applicable express warranty period for the tire.

Some states do not allow disclaimers of implied warranties or limitations on how long an implied warranty lasts, so these limitations may not apply to you.

LIMITATION OF LIABILITY

To the fullest extent permitted by applicable law, Armstrong and its parents, subsidiaries, affiliates, distributors, dealers, representatives, employees, and agents will not be liable for any indirect, special, incidental, consequential, exemplary, multiple, punitive, or other enhanced damages of any kind, including lost profits, loss of use, loss of time, loss of business, loss of reputation or goodwill, property or vehicle damage, towing, [personal injury], or substitute transportation, whether based in contract, tort, strict liability, statute, or any other legal theory, even if advised of the possibility of such damages. To the fullest extent permitted by applicable law, Armstrong's total aggregate liability for any tire or [tire] claim will not exceed the original purchase price paid for the tire at issue. [The foregoing exclusions and limitations do not apply to damages caused by Armstrong's gross negligence or willful misconduct]. These limitations and exclusions are independent of any limited remedy and will apply even if any limited remedy fails of its essential purpose. Some states do not allow the exclusion or limitation of incidental or consequential damages or certain other limitations, so these limitations may not apply to you.

NO AUTHORITY TO MODIFY

No dealer, distributor, retailer, salesperson, employee, representative, or other entity or person is authorized to create, expand, extend, waive, or modify this Limited Warranty, or to assume any obligation or liability on behalf of Armstrong, unless the change is in a written document signed by an authorized representative of Armstrong.

GOVERNING LAW; DISPUTE RESOLUTION; CLASS ACTION WAIVER

This Limited Warranty, and any dispute, claim, or controversy arising out of or relating to this Limited Warranty or any tire covered by this Limited Warranty, including any claim relating to the purchase, condition, performance, use, repair, replacement, adjustment, or refund of any such tire, will be governed by and construed in accordance with the laws of the State of Florida, without regard to its conflict-of-law rules. This governing law provision applies to the fullest extent permitted by law. [Nothing in this Limited Warranty limits or excludes any rights or remedies that cannot be waived under federal law or under the laws of the state in which the covered tire was purchased or used.]

Any dispute, claim, or controversy arising out of or relating to this Limited Warranty or any covered tire must be brought exclusively in the state or federal courts located in Miami-Dade County, Florida, and each party consents to the personal jurisdiction of those courts.

[To the fullest extent permitted by applicable law, any dispute, claim, or controversy arising out of or relating to this Limited Warranty, any covered tire, or any related inspection, repair, replacement, adjustment, refund, or service may be brought only on the claimant's own behalf and not as a plaintiff, representative, or class member in any class, collective, consolidated, representative, private attorney general, or similar proceeding. No court, arbitrator, or other tribunal may combine or consolidate the claims of more than one claimant or otherwise preside over any class, collective, consolidated, representative, private attorney general, or similar proceeding, unless all parties expressly agree in writing to do so after the claim has arisen.]

STATE LAW LIMITATIONS; SEVERABILITY

Certain exclusions, disclaimers, limitations of liability, remedy limitations, claim requirements, transfer restrictions, time limits, or governing law provisions in this Limited Warranty may be limited, prohibited, or unenforceable under

applicable law in some jurisdictions or for some purchasers. In that event, the affected provision will be enforced to the maximum extent permitted by appliable law, adjusted or reformed to the minimum extent necessary to make it enforceable, or severed if adjustment or reformation is not permitted. Any adjustment, reformation, or severance will not affect the validity or enforceability of the remaining provisions of this Limited Warranty.

ENTIRE WARRANTY; MODIFICATIONS


This Limited Warranty constitutes the entire warranty agreement between Armstrong and the purchaser with respect to the tires described herein and supersedes all prior or contemporaneous representations, understandings, or agreements, whether written or oral. Armstrong reserves the right to modify this Limited Warranty at any time; however, any such modification will apply only to tires purchased after the effective date of the modification.

SAFETY WARNING

At Armstrong, your safety is our top priority. Proper maintenance is essential to avoid serious injury and/or death. We recommend the following safety steps:

1. Have your tires regularly inspected by a qualified professional.
2. Follow proper recapping procedures. We strongly recommend a pull point of 4/32" to 6/32" to protect the casing.
3. Tires should only be mounted by trained professionals. Always follow Armstrong's specifications and recommendations and the vehicle owner's manual to avoid under-inflation or overloading.
4. Use only approved rims and wheels.
5. We recommend replacing any tires that are more than ten (10) years old based on their manufacture date.
6. Avoid purchasing used tires, as internal damage may not be visible.
7. Perform routine air pressure checks according to your vehicle manufacturer's specifications.
8. Maintain proper inflation.
9. Replace damaged tires immediately.
10. Do not exceed load/speed ratings.
11. Follow vehicle manufacturer specifications and recommendations.

If you experience vibrations, notice a bulge, or see any irregularities, please have your tires evaluated by a professional immediately.

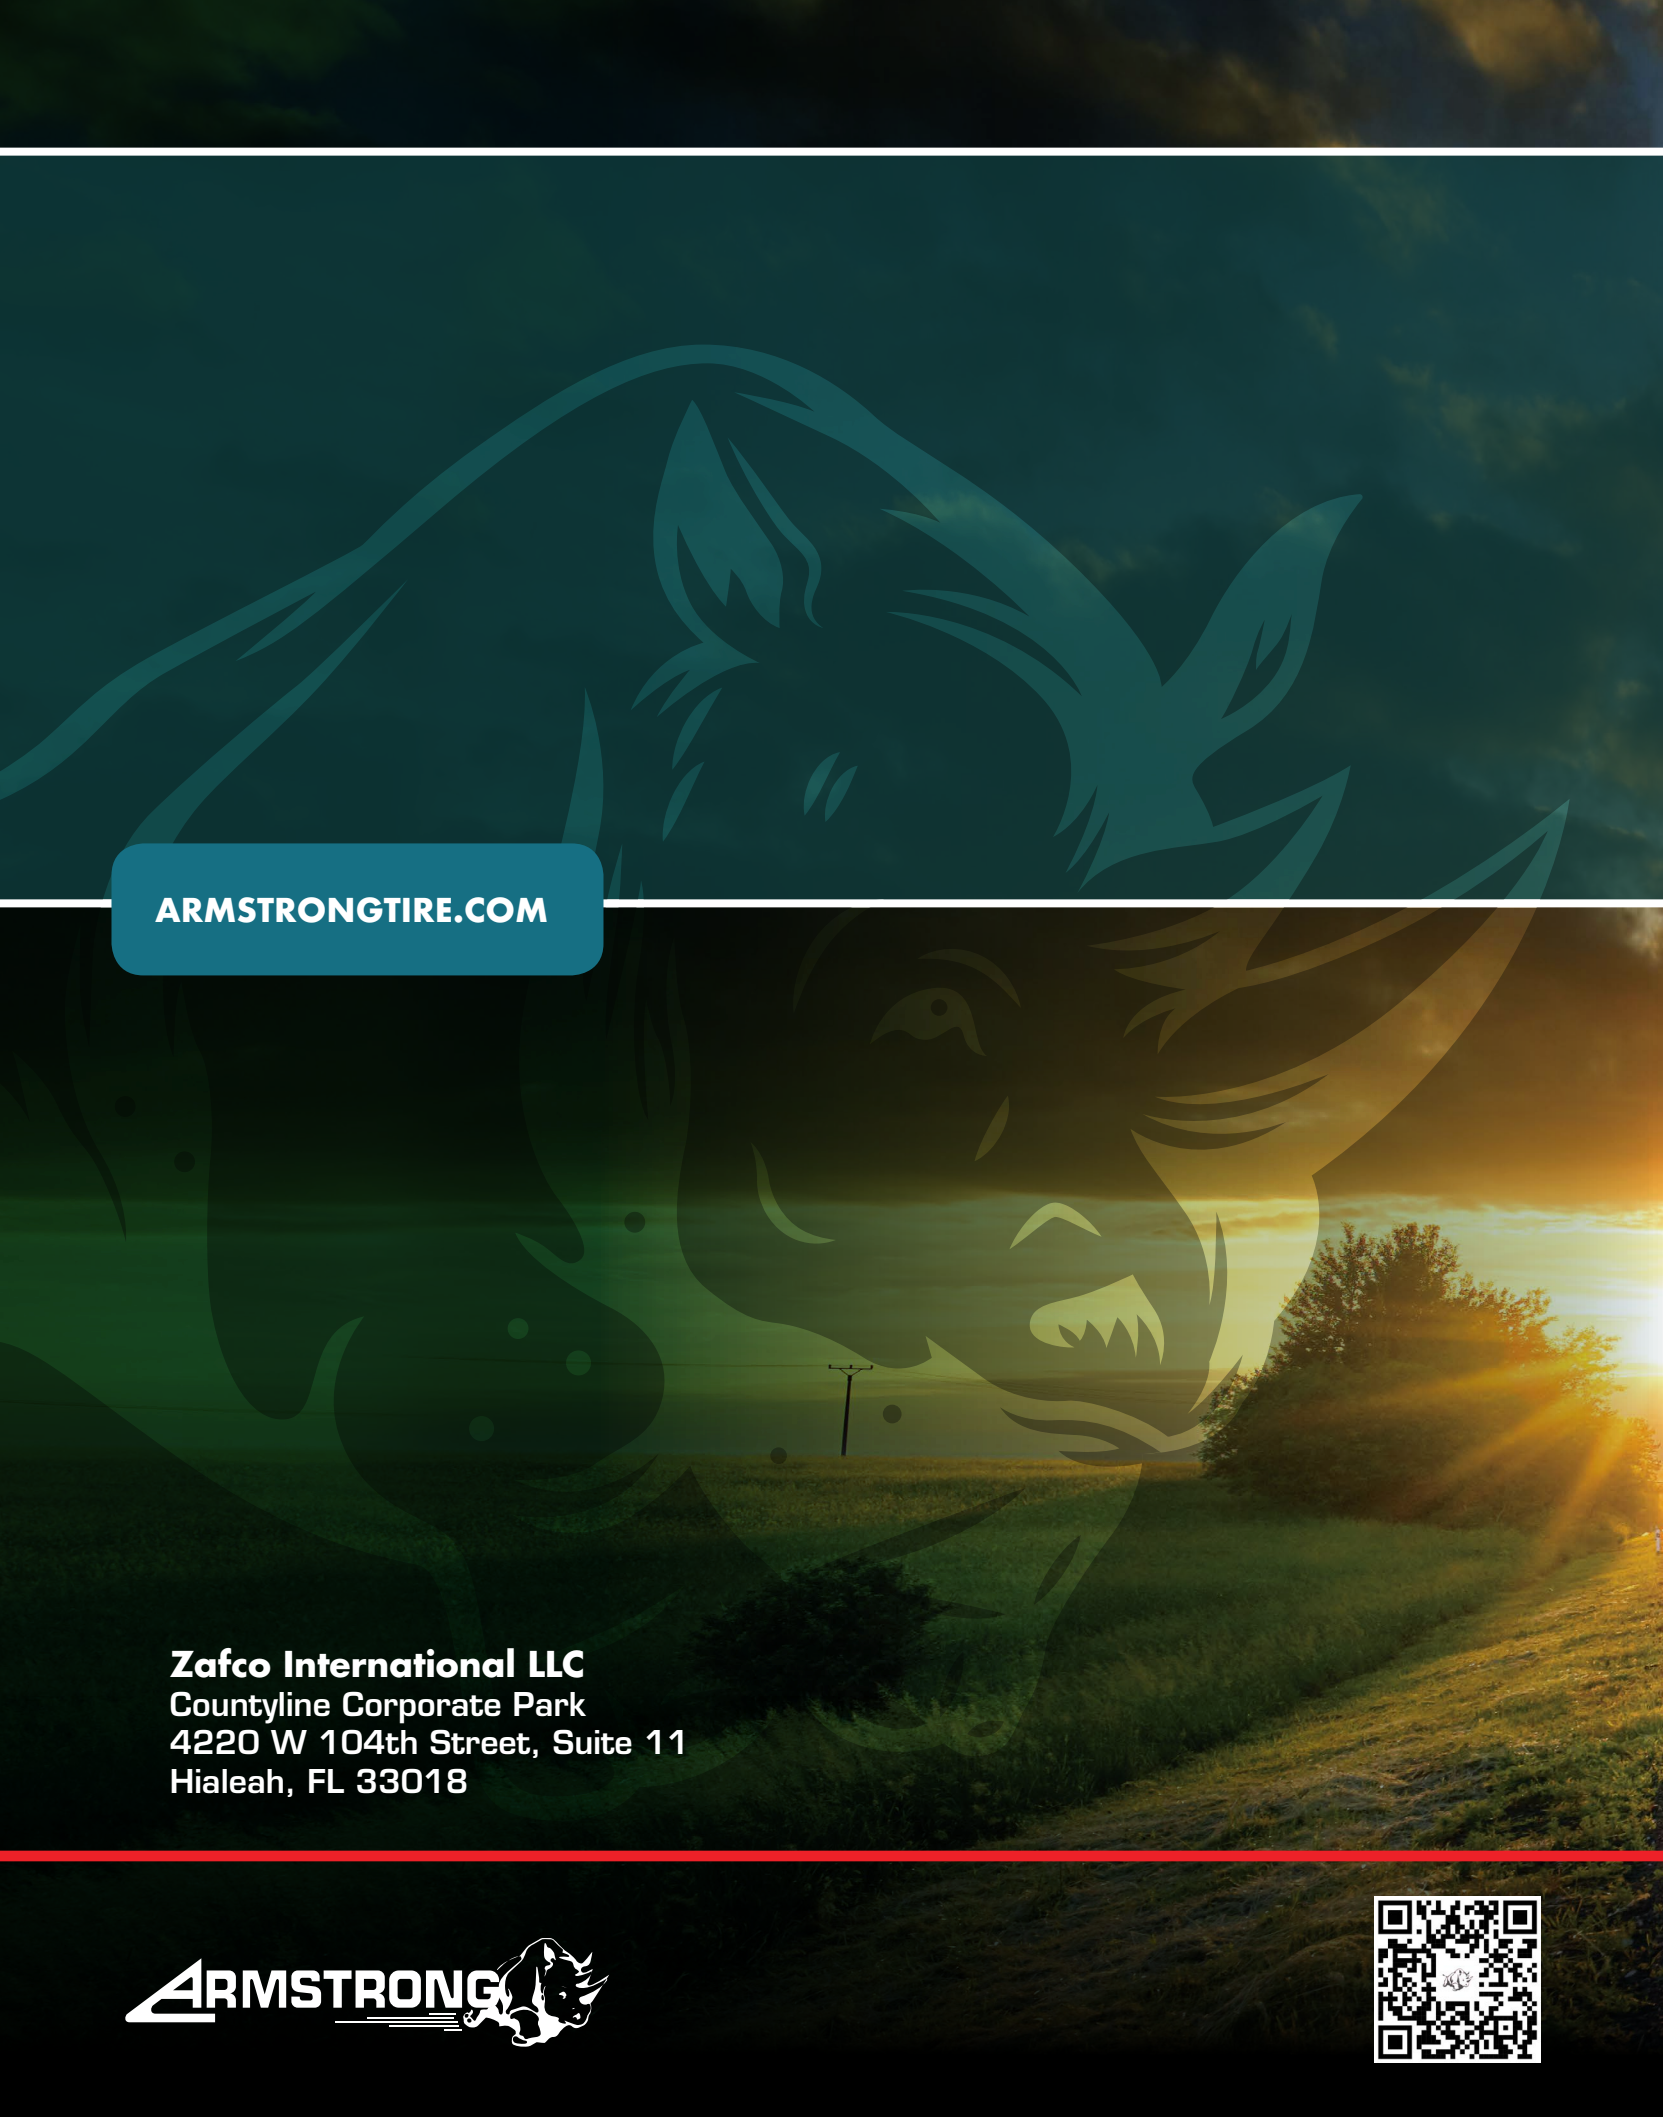

ARMSTRONGTIRE.COM

Zafco International LLC
Countyline Corporate Park
4220 W 104th Street, Suite 11
Hialeah, FL 33018